Alarms & Bells Alarmas y Campanas Alarmes & Sonnneries. . . . 1253
Auxiliary Lighting Luces Auxiliares Éclairage Auxiliare . . . 1272
Back Up Handles Mangos de Seguridad Poignées de Sécurité . . . 1358
Back Up Alarms Alarmas de Retroceso Avertisseurs de Marche Arriére . . . 1251
Blue LED Back Up Lights Luz LED de Retroceso Azul Feux de Recul Blue LED . . . 1280
Cab Accessories Accesorios para la Cabina Accessoires de Cabine . . . 1322
Camera Systems Sistemas de Cámara Systèmes de Caméra . . . 1311
Collision Sentry® . . . 1309
Combination Lights Luces de Combinación Lampes de Combination . . . 1270
Consoles Consolas Consoles . . . 1349
Coveralls Monos de Trabajo Bleu de Travail . . . 1358
Ear Protection Protección Auditiva Protection Auditive . . . 1333
Electronic Code Switches Interruptores Electrónicos de Contraseña Interrupteurs de Codage Électronique . . . 1309
Face Shields Viseras Boucliers de Visage. . . . 1332
Fall Protection Kits Kits de Protección de la Caída Kits de Protection de Chute. . . . 1334
Fans Ventiladores Ventilateurs . . . 1319
Fire Extinguishers Extintores Extincteurs . . . 1312
First Aid Kits Kit de Primeros Auxilios Trousse de premiers soins . . . 1333
Flashers Destelladores Clignotants . . . 1268
Floor Mats Alfombrillas Tapetes . . . 1324
Floyd Bell Piezo Alarms Alarmas Piezoeléctricas Alarmes Floyd Bell Piezo . . . 1254
Fluorescent Bulbs Bombillas Fluorescentes Ampoules Fluorescentes . . . 1290
G-Force Impact Monitors Monitores de Impacto G-Force Moniteurs d'Impact G-Force . . . 1308
Gas Springs Resortes de Gas Ressorts à Gaz . . . 1341
Gauge Kits Kits de Medidores Kits de Jauges . . . 1300
Gauges Medidores Jauges . . . 1293
Gloves Guantes Gants . . . 1356
Headlight Assemblies Asambleas de Luces Delanteras Assemblages de Feux Avants . . . 1281
Heater Accessories Accesorios del Calentador Accessoires de réchauffeur . . . 1322
Heaters Calentadores Réchauffeurs . . . 1320
Horn Buttons, Kits, Relays & Switches Botones de Bocinas, Kits & Interruptores Boutons de Klaxon, Kits & Interrupteurs. . . 1259
Horns Bocinas Klaxon . . . 1256
Hour Meters & Kits Medidores y Kits Horamètre . . . 1305
Indicator Lights Luces Indicadoras Voyants . . . 1286

CONTINUED ON NEXT PAGE

23

Safety & Accessories Seguridad y Accesorios Sécurité & Accessoires

LED Modules Modulos LED Modules LED. **1279**
LED Strobes Luces Estroboscópicas LED Strobes LED. **1262**
LED Work Lights Luces de Trabajo LED Lumières de Travail LED **1277**
Level Sensors Sensores del Nivel Capteurs de Niveau **1316**
Light Bulbs Bombillas Ampoules **1288**
Log Books Libros de Registro Liste de Vérification **1352**
Mini Bars Mini Barras Bars Mini **1270**
Mini Indicator Lights Mini Luces Indicadores Mini-Voyants **1287**
Mirrors Espejos Miroirs **1314**
Miscellaneous Light Bulbs Bombillas Misceláneos Diverses Ampoules **1289**
Overspeed Warning System Advertencia de Pasar Velocidad Máxima Avertisseur de Survitesse. **1309**
Par 36/Sealed Beam Light Bulbs Bombillas de Rayo Selladas Par 36 Ampoules Halogènes Scellées **1291**
Par 46/Sealed Beam Light Bulbs Bombillas de Rayo Selladas Par 46 Ampoules Halogènes Scellées **1292**
Pedal Assemblies Ensamblajes de Pedal Ensemble de pédales **1340**
Pedals & Pedal Pads Pedales & Cubiertas del Pedal Pédales & Couvertures de Pédale **1336**
Ram® Mounts **1350**
Rear Lights Luces Traseras Feux Arrières **1282**
Rectangular Halogen Light Bulbs Bombillas Halógenas Rectangulares Ampoules Halogènes Rectangulaires **1292**
Replacement Halogen Bulbs Bombillas Halógenas de Repuesto Ampoules Halogènes de Rechange **1290**
Rotating Beacons Faros Giratorios Gyrophares. **1269**
Safety Glasses Gafas de Seguridad Lunettes de Sécurité **1327**
Safety Goggles Gafas de Seguridad Lunettes de Protection **1332**
Senders Remitentes Expéditeurs **1301**
Shock Absorber Amortiguador Amortisseur **1318**
SkidWeigh Systems Sistemas de Pesar Paletas Systèmes de Pesage pour Palettes **1310**
Strobe & Flasher Accessories
Accesorios de Luces Estroboscópicas y Destalladores Accessoires pour Feux Stroboscopiques et Phares **1271**
Strobes Luces Estroboscópicas Strobes. **1263**
Training Entrenamiento Outils de Formation **1353**
White Sound/Broadband Back Up Alarms
Alarmas de Retroceso con Sonido Blanco Systèmes d'Alarme de Secours à Bruit Blanc **1255**
Work Lights Luces de Trabajo Phares de Travail **1274**

Back Up Alarms Alarmas de Retroceso Avertisseurs de Marche Arriére

1000 Series

- Conforms to CE

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA10302W	12-24	85	2.25'' x 1.50'' x 2.94'' 57mm x 38mm x 75mm	0.25	Yes	0.25	Vertical	
STA10400W	12	92	2.25'' x 1.50'' x 2.94'' 57mm x 38mm x 75mm	0.35	Yes	0.35	Vertical	

2000 Series

- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA20302	12-24	87	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	D
STA20307	12-80	87	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+290/-400	Universal	D
STA20502	12-24	97	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	C
STA20504	12-48	97	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	C
STA20507	12-80	97	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+290/-400	Universal	C
STA20602	12-24	102	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	
STA20154A	12-48	77-97**	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	
STA20162A	12-24	77-102**	4.00'' x 1.62'' x 2.73'' 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	

2100 Series

- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA21502W	12-24	97	4.25'' x 1.62'' x 2.74'' 108mm x 41mm x 70mm	<0.6	Yes	+100/-400	Universal	C
STA21602W	12-24	102	4.25'' x 1.62'' x 2.74'' 108mm x 41mm x 70mm	<0.6	Yes	+290/-400	Universal	

2200 Series

- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA22702W	12-24	107	4.25'' x 1.62'' x 2.74'' 108mm x 41mm x 70mm	<0.8	Yes	+100/-400	Universal	B

2500 Series

- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA25302	12-24	87	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	D
STA25307	12-80	87	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	D
STA25502	12-24	97	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	C
STA25504	12-48	97	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	C
STA25507	12-80	97	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	C
STA25602	12-24	102	2.62'' x 1.62'' x 3.92'' 67mm x 41mm x 100mm	<0.6	Yes	+100/-400	Vertical	

Back Up Alarms Alarmas de Retroceso Avertisseurs de Marche Arriére

3200 Series
- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA32502	12-24	97	5.00" x 3.00" x 2.78" 127mm x 76mm x 71mm	<0.6	Yes	+100/-400	Universal	C
STA32602	12-24	102	5.00" x 3.00" x 2.78" 127mm x 76mm x 71mm	<0.6	Yes	+100/-400	Universal	
STA32702	12-24	107	5.00" x 3.00" x 2.78" 127mm x 76mm x 71mm	<0.6	Yes	+100/-400	Universal	B
STA32264A	12-48	82-102**	5.00" x 3.00" x 2.78" 127mm x 76mm x 71mm	<0.6	Yes	+100/-400	Universal	

3500 Series
- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA35272A	12-24	82-107**	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400	Universal	
STA35382A	12-24	87-112**	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400	Universal	
STA35582A	12-24	97-112**	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400	Universal	
STA35702	12-24	107	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400	Universal	B
STA35802	12-24	112	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400	Universal	A
STA35803	12-36	112	5.00" x 4.00" x 3.11" 127mm x 102mm x 79mm	<0.8	Yes	+100/-400		A

4000 Series
- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA40802	12-24	112	7.25" x 4.00" x 3.25" 184mm x 102mm x 83mm	<0.8	Yes	+100/-400	Horizontal	A
STA40582A	12-24	97-112**	7.25" x 4.00" x 3.25" 184mm x 102mm x 83mm	<0.8	Yes	+100/-400	Horizontal	

5000 Series
- Conforms to CE
- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Diameter x Depth)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA50154AW	12-48	77-97**	4.30" x 1.63" 109mm x 41mm	<0.6	Yes	+100/-400	Vertical	
STA50162AW	12-24	77-102**	4.30" x 1.63" 109mm x 41mm	<0.6	Yes	+100/-400	Vertical	
STA50502W	12-24	97	4.30" x 1.63" 109mm x 41mm	<0.6	Yes	+100/-400	Vertical	C
STA50602W	12-24	102	4.30" x 1.63" 109mm x 41mm	<0.6	Yes	+100/-400	Vertical	
STA50702W	12-24	107	4.30" x 1.63" 109mm x 41mm	<0.6	Yes	+100/-400	Vertical	B

**Self Adjusting Alarms.

All SAFE-T-ALERT® Back Up Alarms are steam cleanable and feature a 2 year warranty.

A.A.D. (Average Amp Draw) and S.P.(V) (Spike Protected(V)).

Back Up Alarms Alarmas de Retroceso Avertisseurs de Marche Arriére

Dual Function

- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)	A.A.D.	Polarity Protected	S.P.(V)	Mounting	SAE J994
STA20502DW	12-24	97	4.00" x 1.62" x 2.73" 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	C
STA20602DW	12-24	102	4.00" x 1.62" x 2.73" 102mm x 41mm x 69mm	<0.6	Yes	+100/-400	Universal	

Dual Tone

- Conforms to cUL/UL

	Voltage	Decibels ▼	Size (Width x Depth x Height)
STA20102DT	12-24	77	4.00" x 1.62"x 2.73" 102mm x 41mm x 69mm
STA20502DT-G	12-24	97	4.00' x 1.62"x 2.73" 102mm x 41mm x 69mm

Back Up Alarm Switch
SYSW-2

- 8A rating
- One-way movement

Back Up Alarm Switch
SYSWM-43

- 5A rating
- A full 360° movement
- Conforms to UL

**Self Adjusting Alarms.

All SAFE-T-ALERT® Back Up Alarms are steam cleanable and feature a 2 year warranty.

A.A.D. (Average Amp Draw) and S.P.(V) (Spike Protected(V)).

Alarms & Bells Alarmas y Campanas Alarmes & Sonnneries

Back up Alert®

	Voltage	Decibels ▼	Conforms to
SY1156	12	87	
SY3156	12	87	

Alarm

	Voltage	Decibels ▼	Conforms to
SY80184	12	97	

Motion Alarm

	Voltage	Decibels ▼	Conforms to
SYSW01	6-28	86	UL

Back Up Bell

	Size	Decibels ▼	Conforms to
SY660	6"diameter	87	
SY861	8"diameter	105	

Floyd Bell Piezo Alarms **Alarmas Piezoeléctricas** Alarmes Floyd Bell Piezo

Turbo Series

- 2900+/- 250Hz
- Available in 7 different tones: continuous, beep, warble, siren, whoop, staccato & chime
- Available in 2 volume levels and 4 terminations
- 1.22" (31mm) height
- 1.41" (36mm) diameter
- Conforms to cUL/UL

	Voltage ▼	Decibels	*A.A.D.	Mount	Tone
SYTMC-V86-201-S	30-120	75-95dB+/-5	15mA	Panel mount	Medium loud continuous
SYTMW-V86-201-S-S	30-120	75-95dB+/-5	15mA	Panel mount	Medium loud slow warble
SYTXC-V86-515-S	5-15	92-103dB+/-5	50mA	Panel mount with volume control	Extra loud continuous
SYTXO-V86-515-S	5-15	92-103dB+/-5	50mA	Panel mount with volume control	Extra loud whoop
SYTXS-V86-515-S	5-15	92-103dB+/-5	50mA	Panel mount with volume control	Extra loud siren tone
SYTXT-V86-515-S	5-15	92-103dB+/-5	50mA	Panel mount with volume control	Extra loud staccato
SYTXW-V86-515-S-S	5-15	92-103dB+/-5	50mA	Panel mount with volume control	Extra loud slow warble
SYTMC-V86-531-S	5-24	75-95dB+/-5	15mA	Panel mount with volume control	Medium loud continuous
SYTCH-V86-530-S-M	5-30	75-95dB+/-5	40mA	Panel mount with volume control	Medium loud moderate chime
SYTMC-V86-530-S	5-30	75-95dB+/-5	10mA	Panel mount with volume control	Medium loud continuous
SYTMB-V86-948-S-F	9-48	75-95dB+/-5	10mA	Panel mount with volume control	Medium loud fast beep
SYTMC-V86-948-S	9-48	75-95dB+/-5	10mA	Panel mount with volume control	Medium loud continuous
SYTMW-V86-948-S-F	9-48	75-95dB+/-5	10mA	Panel mount with volume control	Medium loud fast warble

AudioLarm® II Series

- 2900+/- 250Hz
- Available in 4 tones: continuous, beep, warble & chime
- 1.41" (36mm) diameter
- Conforms to cUL/UL

	Height	Voltage ▼	Decibels	*A.A.D.	Mounting	Tone
SYMC-07-130-S	0.96" 24mm	1-30	70-93dB+/-5	20mA	Panel mount	Medium loud continuous
SYMC-09-948-S	1.35" 34mm	1-48	85-95dB+/-5	20mA	Panel mount	Medium loud continuous
SYCH-09-525-Q-M	1.35" 34mm	5-25	70-93dB+/-5	25mA	Panel mount	Medium loud moderate chime
SYMW-09-530-Q	1.35" 34mm	5-30	85-95dB+/-5	20mA	Panel mount	Medium loud moderate warble
SYXB-09-630-Q-S	1.35" 34mm	6-30	85-103dB+/-5	50mA	Panel mount	Extra loud slow beep

Ultra Series

- 2100+/- 250Hz
- 1.41" (36mm) diameter
- Conforms to cUL/UL

	Height	Voltage ▼	Decibels	*A.A.D.	mounting	Tone
SYUC-09-628-Q	1.35" 34mm	6-28	95-108dB+/-5	50mA	Panel mount	Ultra loud continuous

*A.A.D. (Average Amp Draw)

Gasket

SY61663

Plastic Nut

SY95916

White Sound/Broadband Back Up Alarms

Alarmas de Retroceso con Sonido Blanco Systèmes d'Alarme de Secours à Bruit Blanc

- Lifetime warranty
- Tough, durable, guaranteed water resistant (IP68); Solid-state, spark-free electronics; Epoxy sealed against mud, water & vibration
- Polarity protected
- Multi kHz frequency
- Surge protection
- Conforms to SAE J994, CE and e marked (EMC)
- Operating Temperature: -40°C to +85°C

- Garantía de por vida
- Esta alarma es resistente, duradera y garantizada a prueba de agua (IP68); Estado sólido, libre de chispas; Completamente sellada para protegerla contra el barro, el agua y vibración
- Protegida contra la polaridad
- Multi-Frecuencia kHz
- Protección contra sobretensiones
- Cumple con SAE J994, CE y marcada 'E' (EMC)
- Temperatura de funcionamiento: de -40°C hasta +85°C

- Garantie à Vie
- Imperméabilité garantie (IP68), électronique d'état solide, protégée contre les étincelles, scellée par époxy contre la boue, l'eau et la vibration.
- Protégée contre la Polarité
- Multi-fréquence kHz
- Protection contre les Surtensions
- Conforme à SAE J994, CE et marquée 'e' (EMC)
- Température de Fonctionnement: entre -40°C et 85°C

Light Duty

- 3.00" 76mm hole centers
- Sounder unit: speaker
- 3.54"width x 1.93"height x 1.54"diameter 91mm x 55mm x 45mm

	Voltage	Decibels ▼	Vibration	Mechanical Shock	Current
SY82BB	12-24	82	10G	100G	0.5A
SY87BB	12-24	87	10G	100G	0.5A
SY92BB	12-24	92	10G	100G	0.5A
SY97BB	12-24	97	10G	100G	0.5A

Medium Duty

- 3.86"- 4.25" 98mm-108mm hole centers
- Sounder unit: speaker
- 5.00"width x 3.00"height x 2.56"depth 127mm x 65mm x 76mm

	Voltage	Decibels ▼	Vibration	Mechanical Shock	Current
SY97BB-SA	12-24	77-97 Self adjusting	10G	100G	0.5A

High Voltage

- 3.86"-4.25" 98mm-108mm hole centers
- Sounder unit: speaker
- 5.00"width x 3.00"height x 2.56"depth 127mm x 65mm x 76mm

	Voltage	Decibels ▼	Vibration	Mechanical Shock	Current
SY87BB-HV	36-80	87	10G	100G	0.3A
SY97BB-HV	36-80	97	10G	100G	0.3A

Heavy Duty

- 6.02" 153mm hole centers
- Sounder unit: driver
- 6.81"width x 3.15"height x 3.74"depth 172mm x 79mm x 95mm

	Voltage	Decibels ▼	Vibration	Mechanical Shock	Current
SY102BB	12-24	102	10G	100G	1.0A
SY107BB	12-24	107	10G	100G	1.0A
SY107BB-SA	12-24	87-107 Self adjusting	10G	100G	1.0A

Horns Bocinas Klaxon

Light Duty

- 1 year warranty

	Voltage	Decibels ▼	Diameter		Conforms to	Terminals
SY1244425	12	109	5"	127mm		2
SY110	36-48	110	4¼"	108mm		
SY113	12	110	4¼"	108mm	UL	
SY115	24	110	4¼"	108mm	UL	
SY118	72-80	110	4¼"	108mm		
SY1222709	24	117	4¾"	120mm		2
SY99595	36-48	118	4⅞"	121mm		2

Heavy Duty

- 1 year warranty

	Voltage	Decibels ▼	Diameter		Conforms to
SY683219	12	102	3⅞"	99mm	
SY100	12	120	5"	127mm	UL
SY101	24	120	5"	127mm	UL
SY103	48	120	5"	127mm	UL
SY105	36-48	120	5"	127mm	UL
SY125	36	120	5"	127mm	

Electronic Horn

- 1 year warranty

	Voltage	Decibels ▼	Size (Width x Depth x Height)	Conforms to
STA22704HW	12-48	107	3.25" x 1.62" x 2.74" 83mm x 41mm x 70mm	UL CE
SY108161	12-60	110	5.00" x 3.75" x 3.00" 127mm X 93mm X 76mm	

3200 Series

- 1 year warranty

	Voltage	Decibels ▼	Size (Width x Depth x Height)	Conforms to
STA32704HW	12-48	107	5.00" x 3.00" x 2.78" 127mm x 76mm x 71mm	UL CE

▼	Voltage	Decibels	Size	Conforms to	Terminals
SY102	36	111	5" dia 127mm		2
SY106	48	115	3⅞" dia 87mm		2
SY107	12-48	107	4⅝"dia 117mm		2
SY108	12	116	4" dia 102mm		1

SY254872 - Bracket that fits SY108

▼	Voltage	Decibels	Size	Conforms to	Terminals
SY109	24-48	116	3½" dia 89mm		2
SY111	12	110	4¼" dia 108mm		1
SY112	12	115	4" dia 102mm	UL	2
SY114	24	108	4" dia 102mm		2

Horns Bocinas Klaxon

	Voltage	Decibels	Size	Conforms to	Terminals
SY116	36-48	104-114	3⅞" dia 98mm		2
SY117	24	110	3½" dia 89mm		2
SY119	36-48	105	3⅞"dia 98mm		2
SY120	72-80	105	3⅞"dia 98mm		2
SY121	12	110	3½"dia 89mm		2
SY34336	36	114	3½" dia 88mm		
SY34481	12	105-118	3½" dia 89mm		3-pins
SY40154	12	100	3½" dia 89mm		2
SY77808	12	102	3½" dia 88mm		
SY80598	12-60	114	3⅘" 96mm	UL	2

	Voltage	Decibels	Size	Conforms to	Terminals
SY82561	12	104	3½" dia 89mm		2
SY82855	12	105	3½"dia 88mm		2
SY83498	12	106	2½" dia 65mm		2
SY88699	24	116	3½" dia 88mm		2
SY88711	24-48	114	3½" dia 88mm		2
SY88722	12	106	2⅝" dia 71mm		2
SY88725	12	114	3" dia 76mm		2
SY88726	12	109	3½" dia 88mm		3
SY88727	24	110	3½" dia 88mm		3
SY88728	36-48	120	3½" dia 88mm		2

Horns Bocinas Klaxon

▼	Voltage	Decibels	Size	Conforms to	Terminals
SY88729	12	110	3½" dia 88mm		2
SY88730	24	114	3½" dia 88mm		2
SY88731	36	115	3½" dia 89mm		3
SY88732	24	114	3½" dia 89mm		3
SY1220284	12	107	3½" dia 89mm		2
SY1222003	12	110	2⅘"dia 72mm		2
SY1222016	12	110	2⅘"dia 72mm		2
SY1222290	12	115	2⅘" dia 71mm		2
SY1244321	12	105-118	3½" dia 89mm		3-pins

▼	Voltage	Decibels	Size	Conforms to	Terminals
SY1244420	24	118	3" dia 76mm		2
SY1244421	12	115	3½" dia 88mm		2
SY1244422	12-48	110	3½" 88mm		3-pins
SY1244423	12	90	2" dia 50mm		2
SY1244424 	24	115	3⅞" dia 96mm		2
SYE100	12	105-115 • Electronic	3½"dia 89mm	UL	2
SYE109	24-48	105-118 • Electronic	3½"dia 89mm	UL	2
SYE118	72-80	105-118 • Electronic	3½"dia 89mm	UL	2

Horn Buttons, Kits, Relays & Switches

Botones de Bocinas, Kits & Interruptores Boutons de Klaxon, Kits & Interrupteurs

	Description ▼
SY266	12V relay

SY41561	12V relay

SY623	12V relay

SY38379	Base plate

SY23296	Button

SY29608	Button

SY31231	Button

SY36484	Button

	Description ▼
SY39557	Button

SY72051	Button

SY73425	Button

SY74045	Button

SY77807	Button

SY78104	Button

SY83242	Button

SY87965	Button

	Description ▼
SY88543	Button

SY88545	Button

SY88547	Button

SY88548	Button

SY88549	Button

SY88550	Button

SY88551	Button

SY88554	Button

Horn Buttons, Kits, Relays & Switches

Botones de Bocinas, Kits & Interruptores Boutons de Klaxon, Kits & Interrupteurs

	Description ▼
SY1244432	Button
SY73008	Button cover
SY107305	Button kit
SY31976	Button kit
SY34614	Button kit
	
SY41047	Button kit
SY41149	Button kit
SY41180	Button kit

	Description ▼
SY41181	Button kit
SY42675	Button kit
SY47510	Button kit
SY54106	Button kit
SY88542	Button kit
SY88552	Button kit
SY107919	Button kit
SY88544	Cap

	Description ▼
SY44888	Cap assembly
SY1244439	Contact
SY1244434	Contact ring
SY23198	Cover
SY31664	Cover
SY88541	Cover
SY1244433	Dash mount button
SY77888	Floor mount button

Horn Buttons, Kits, Relays & Switches

Botones de Bocinas, Kits & Interruptores Boutons de Klaxon, Kits & Interrupteurs

	Description ▼
SY40224	Horn kit
SY96992	Left button
SY48093	Relay
	
SY96993	Right button
SY28139	Switch

	Description ▼
SY31829	Switch
SY88351	Switch
SY88352	Switch
SY88540	Switch button
SY44012	Switch button

	Description ▼
SY31420	Switch kit
SY130	Switch (Universal)
SY42634	Switch
SYMS105	Switch
SY23108	Switch

LED Strobes Luces Estroboscópicas LED Strobes LED

All LED Strobes are Polarity and Diode Protected, except Meteorlite 20 Brake Strobe.

Lights are available in multiple colors, profiles and mounts. Not all lights are available in all colors, profiles or mounts. Use the following information to order the right light for your application:

- **Colors available are amber (-A), blue (-B), clear (-C), green (-G), and red (-R)**
- **Mounts available are magnetic (M), pipe (P), and permanent**
- **Profiles available are high (H) and low (L)**

If you cannot find the light needed in the combination of color, mount and profile, please contact a sales representative for assistance.

Todas las Luces Estroboscópicas LED están protegidas contra Polaridad y Diodo excepto las Luces Estroboscópicas LED Meterorlite 20 de frenos.

Las luces de TVH están disponibles en múltiples colores, perfiles y montajes. No todas las luces están disponibles en todos los colores, perfiles y montajes. Use la siguiente información para ordenar la luz correcta para su aplicación:

- Los colores disponibles son: ámbar (-A), azul (-B), transparente (-C), verde (-G) y rojo (-R)
- Los montajes disponibles son magnético (M), tubo (P) y permanente
- Los perfiles disponibles son altos (H) y bajos (L)

Si usted no puede encontrar la luz necesaria con la combinación de color, montaje y perfil, por favor póngase en contacto con un representante de ventas para ayuda.

Tous les Strobes LED sont protégés contre la polarite et la diode sauf Meteorlite 20 Brake Strobe.

Les lampes TVH sont disponibles en plusieurs couleurs, profilés et montés. Les lampes ne sont pas toutes disponibles dans toutes les couleurs, tous les profilés ou montés. Utilisez l'information ci-dessous afin de pouvoir commander la lampe appropriée pour votre application :

- Couleurs disponibles : ambre (-A), bleu (-B), clair (-C), vert, (-G) et rouge (-R).
- Montés disponibles: magnétique (M), montage sur tube (P) et permanent
- Profilés disponibles : haut (H) et bas (L)

Si vous n'arrivez pas à trouver la combinaison désirée (couleur, monté et profilé), n'hésitez pas à contacter votre représentant.

METEORLITE 2 LED

- 2 year warranty
- UL & CE approved
- Conforms to cUL/UL

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	LEDs per head	Current Draw
SY361100-A-LED	12-80	3.54"x 3.63" (90mm x 92mm)	ABS & 3-hole	60±10 quad fpm	5	0.1A average
SY361100M-A-LED	12-24					

METEORLITE 5 LED

- 2 year warranty
- UL & CE approved
- Conforms to cUL/UL

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	LEDs per head	Current Draw
SY361005-A-LED	12-80	2.75" x 5.16" (70mm x 131mm)	PA & 2-hole	60±10 quad fpm	6	0.1A average
SY361005M-A-LED	12-24					
SY361005P-A-LED	12-80					

METEORLITE 55 LED

- 2 year warranty
- UL & CE approved
- Conforms to cUL/UL

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	LEDs per head	Current Draw
SY361005L-A-LED	12-80	2.75" x 3.16" (70mm x 80mm)	PC & 2-hole	60±10 quad fpm	6	0.1A average

METEORLITE 22050 LED

- 5 year warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	LEDs per head	Current Draw
SY22050L-A	12-48	6.75"x 4.50" (171mm x 114 mm)	Aluminum	11 flash patterns available	24	0.8A max @ 12V

Strobes Luces Estroboscópicas Strobes

All Strobes have a 1 year warranty.

TVH lights are available in multiple colors, profiles and mounts. Not all lights are available in all colors, profiles or mounts. Use the following information to order the right light for your application:

- Colors available are amber (-A), blue (-B), clear (-C), green (-G), and red (-R)
- Mounts available are magnetic (M), pipe (P), and permanent
- Profiles available are high (H) and low (L)

If you cannot find the light needed in the combination of color, mount and profile please contact a sales representative for assistance.

Todas las Luces Estroboscópicas tienen una garantía de 1 año.

Las luces de TVH están disponibles en múltiples colores, perfiles y montajes. No todas las luces están disponibles en todos los colores, perfiles y montajes. Use la siguiente información para ordenar la luz correcta para su aplicación:

- Los colores disponibles son: ámbar (-A), azul (-B), transparente (-C), verde (-G) y rojo (-R)
- Los montajes disponibles son magnético (M), tubo (P) y permanente
- Los perfiles disponibles son altos (H) y bajos (L)

Si usted no puede encontrar la luz necesaria con la combinación de color, montaje y perfil, por favor póngase en contacto con un representante de ventas para ayuda.

Tous les Strobes sont protégés ont une garantie de 1 an.

Les lampes TVH sont disponibles en plusieurs couleurs, profilés et montés. Les lampes ne sont pas toutes disponibles dans toutes les couleurs, tous les profilés ou montés. Utilisez l'information ci-dessous afin de pouvoir commander la lampe appropriée pour votre application :

- Couleurs disponibles : ambre (-A), bleu (-B), clair (-C), vert, (-G) et rouge (-R).
- Montés disponibles: magnétique (M), montage sur tube (P) et permanent
- Profilés disponibles : haut (H) et bas (L)

Si vous n'arrivez pas à trouver la combinaison désirée (couleur, monté et profilé), n'hésitez pas à contacter votre représentant.

METEORLITE 2

- **1 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY360080	12-80	5.00" x 3.62" (127mm x 92mm)	ABS & 3-hole w/ metal ring	60±10 single fpm	0.25A max	1.00W	SY360-TUBE	SAE J1318 Class III, UL & CE approved
SY361100	12-72							cUL

METEORLITE 25

- **1.4 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height x Depth)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY367000	12-72	5.50" x 2.65" x 2.25" (140mm x 67mm x 57mm)	ABS & 2-hole	60±10 single fpm	0.25A max	1.40W	SY360-TUBE	SAE J1318 Class III, UL & cUL approved

METEORLITE 7

- **1.5 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY537000	12-80	4.75" x 3.90" x 3.00" (121mm x 99mm x 76mm)	ABS & 2-hole	60±10 single fpm	0.40A max	1.50W	SY537010	SAE J1318 Class III, UL & cUL approved
SY537000E	12-80							

METEORLITE 20 Brake Strobe

- **1.6 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY365012	12	9.75" x 3.00" x 2.00" (248mm x 76mm x 51mm)	ABS & 2-hole	60±10 fpm	2.50A	1.00W	SY360-TUBE	
SY365024	24							
SY365036	36							
SY365048	48							

Strobes Luces Estroboscópicas Strobes

METEORLITE 5

- **2 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY361005	12-80	2.56" x 5.00" (65mm x 127mm)	PA & 2-hole	75±10 single fpm	0.50A max	2.50W	SY361015	SAE J1318 Class III, UL & cUL approved
SY361005M	12-80							
SY361005PM	12-80							
SY361005PF	12-80							

METEORLITE 6

- **2 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY361006	12-72	2.56" x 5.00" (65mm x 127mm)	PA & 2-hole	75±10 single/ double fpm	0.50A	2.50W	SY361015	UL approved

METEORLITE 920

- **2.7 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY920000	12-48	5.68" x 4.62" (144mm x 117mm)	Rubber & 2-hole	75±10 single fpm	0.65A max @ 12.8V 0.17A max @ 48V	3.40W	SY22010-TUBE	SAE J1318 Class III

METEORLITE 200

- **3 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY362000	12-48	4.50" x 4.00" (114mm x 102mm)	Poly-carbonate & 3-hole	70±10 fpm	0.50A max @ 12.8V 0.40A max @ 48V		SY362300	SAE J1318 Class III
SY362000H	12-48	4.62" x 5.90" (117mm x 150mm)						

METEORLITE 925

- **3 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY925000	12-48	5.68" x 4.62" (144mm x 117mm)	Rubber & 2-hole	65±10 double fpm	0.65A max @ 12.8V 0.20A max @ 48V	4.50W	SY22010-TUBE	SAE J1318 Class III

METEORLITE 22210

- **4.5 Joule ▼**
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY22210L	120	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	80±10 single fpm	0.25A max @ 120V		SY360-1200	
SY22210H	120	6.75" x 6.25" (171mm x 159mm)						

Strobes Luces Estroboscópicas Strobes

METEORLITE 100

- **6 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY363100	12-24	5.00" x 3.62" (127mm x 92mm)	3-hole	70±10 quad fpm	1.00A avg @ 12.8V	7.00W	SY363-TUBE2	SAE J1318 Class II
SY363100M	12-24							

METEORLITE 200HS

- **6 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY362002HS	12-24	6.50" x 5.87" (165mm x 149mm	Poly-carbonate & 3-hole	75±10 single fpm	0.90A max @ 12.8V 0.60A max @ 24V	7.50W	SY363003	SAE J1318 Class II

METEORLITE 950

- **7 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY950000	12-48	5.68" x 4.62" (144mm x 117mm)	Rubber & 2-hole	65±10 double fpm	1.00A max @ 12.8V 0.47A max @ 48V	8.00W	SY22010-TUBE	SAE J1318 Class II

METEORLITE 200HD

- **7 Joule** ▼
- 1 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY362002HD	12-24	6.50" x 5.87" (165mm x 149mm)	Poly-carbonate & 3-hole	75±10 double fpm	0.90A max @ 12.8V 0.60A max @ 24V	8.75W	SY363003	SAE J1318 Class II

METEORLITE 400

- **8 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY451000	12-48	6.50" x 5.25" (165mm x 133mm)	Die cast aluminum & J-Hook mount	80±10 double fpm	1.50A max @ 12.8V 0.70A max @ 48V		SY360-8451	SAE J1318 Class II
SY451000M	12-48							

METEORLITE 600

- **8 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY651000	12-48	6.50" x 6.25" (165mm x 159mm)	Die cast aluminum & J-Hook mount	80±10 double fpm	1.50A max @ 12.8V 0.70A max @ 48V	11.00W	SY360-8651	SAE J1318 Class II
SY651000M	12-48	6.50" x 6.25" (165mm x 159mm)						
SY675000	12-48	6.50" x 8.00" (165mm x 203mm)						
SY675000M	12-48	6.50" x 8.00" (165mm x 203mm)						

Strobes Luces Estroboscópicas Strobes

METEORLITE 22010		Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
• **8 Joule** ▼ • 2 year power supply warranty	SY22010L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	80±10 double fpm	2.30A max @ 12.8V 1.50A max @ 24V	11.00W	SY22010-TUBE	SAE J1318 Class II
	SY22010LM	12-24	6.75" x 4.50" (171mm x 114mm)						
	SY22010H	12-24	6.75" x 6.25" (171mm x 158mm)						
	SY22010HM	12-24	6.75" x 6.25" (171mm x 158mm)						
	SY22110L	36-48	6.75" x 4.50" (171mm x 114mm)						
	SY22110H	36-48	6.75" x 6.25" (171mm x 158mm)						

METEORLITE 22009		Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
• **10 Joule** ▼ • 2 year power supply warranty	SY22009L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	70±10 quad fpm	2.30A max @ 12.8V 1.50A max @ 24V	12.00W	SY22010-TUBE	SAE J1318 Class II
	SY22009LM	12-24	6.75" x 4.50" (171mm x 114mm)						
	SY22009PL	12-24	6.75" x 4.50" (171mm x 114mm)						
	SY22009PLM	12-24	6.75" x 4.50" (171mm x 114mm)						
	SY22009H	12-24	6.75" x 6.25" (171mm x 159mm)						
	SY22009HM	12-24	6.75" x 6.25" (171mm x 159mm)						
	SY22009PH	12-24	6.75" x 6.25" (171mm x 159mm)						
	SY22009PHM	12-24	6.75" x 6.25" (171mm x 159mm)						

METEORLITE 22020		Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
• **10 Joule** ▼ • 2 year power supply warranty	SY22020L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	80±10 double fpm	2.50A max @ 12.8V 1.70A max @ 24V	13.50W	SY22020-TUBE	SAE J1318 Class I, II & CE
	SY22020LM	12-24	6.75" x 4.50" (171mm x 114mm)						
	SY22020H	12-24	6.75" x 6.25" (171mm x 159mm)						
	SY22020HM	12-24	6.75" x 6.25" (171mm x 159mm)						

METEORLITE 975		Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
• **13 Joule** ▼ • 2 year power supply warranty	SY975000	12-48	5.68" x 4.62" (144mm x 117mm)	Rubber & 2-hole	80±10 double fpm	2.50A max @ 12.8V 1.00A max @ 48V	13.50W	SY22020-TUBE	SAE J1318 Class I

METEORLITE 800

- **13 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY825000	12-48	6.50" x 6.25" (165mm x 159mm)	Die cast aluminum & J-Hook mount	80±10 double fpm 70±10 quad fpm	2.00A max @ 12.8V 0.90A max @ 48V	18.00W	SY360-8651	SAE J1318 Class I
SY825000M	12-48	6.50" x 6.25" (165mm x 159mm)						
SY851000	12-48	6.50" x 6.25" (165mm x 159mm)						
SY851000M	12-48	6.50" x 6.25" (165mm x 159mm)						
SY82500Q	12-48	6.50" x 8.00" (165mm x 203mm)						
SY82500QM	12-48	6.50" x 8.00" (165mm x 203mm)						
SY85100Q	12-48	6.50" x 8.00" (165mm x 203mm)						
SY85100QM	12-48	6.50" x 8.00" (165mm x 203mm)						

METEORLITE 22030

- **13 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY22030L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	70±10 quad fpm	2.60A max @ 12.8V 1.80A max @ 24V	18.00W	SY22020-TUBE	SAE J1318 Class I
SY22030LM	12-24	6.75" x 4.50" (171mm x 114mm)						
SY22030H	12-24	6.75" x 6.25" (171mm x 159mm)						
SY22030HM	12-24	6.75" x 6.25" (171mm x 159mm)						

METEORLITE 22035

- **7low/13high Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY22035L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	70±10 quad fpm	2.60A max @ 12.8V 1.80A max @ 24V	16.00W	SY22020-TUBE	SAE J1318 Class I
SY22035H	12-24	6.75" x 6.25" (171mm x 159mm)						
SY22035HM	12-24	6.75" x 6.25" (171mm x 159mm)						

METEORLITE 22029

- **15 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY22029L	12-24	6.75" x 4.50" (171mm x 114mm)	Aluminum & combination 1" NPT/3-hole permanent or magnetic mount	70±10 quad fpm	2.60A max @ 12.8V 1.80A max @ 24V	18.00W	SY22020-TUBE	SAE J1318 Class I or Class II
SY22029LM	12-24	6.75" x 4.50" (171mm x 114mm)						
SY22029H	12-24	6.75" x 6.25" (171mm x 159mm)						
SY22029HM	12-24	6.75" x 6.25" (171mm x 159mm)						

METEORLITE 1660

- **15 Joule** ▼
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY166000M	12-24	6.50" x 8.00" (165mm x 203mm)	Die cast aluminum & J-Hook mount	120±10 single fpm	4.00A max @ 12.8V 3.50A max @ 24V	30.00W	SY360-8652	SAE J1318 Class I
SY166000	12-24							

Strobes Luces Estroboscópicas Strobes

METEORLITE 1600

- **23 Joule ▼**
- 2 year power supply warranty

	Voltage	Dimensions (Diameter x Height)	Base & Mount	Flash Rate	Current Draw	Output Power	Flash Tube	Conforms to
SY160000L	12-24	6.50" x 8.00" (165mm x 203mm)	Die cast aluminum & J-Hook mount	50±10 double fpm	4.00A max @ 12.8V 3.20A max @ 24V	20.00W	SY360-1600	SAE J1318 Class I
SY160000H	12-24							

Flashers Destelladores Clignotants

All Flashers have a 1 year warranty.

Lights are available in multiple colors, profiles and mounts. Not all lights are available in all colors, profiles or mounts. Use the following information to order the right light for your application:

- **Colors available are amber (-A), blue (-B), clear (-C), green (-G), and red (-R)**
- **Mounts available are magnetic (M), pipe (P), and permanent**
- **Profiles available are high (H) and low (L)**

If you cannot find the light needed in the combination of color, mount and profile, please contact a sales representative for assistance.

Todas las Luces Estroboscópicas tienen una garantía de 1 año.

Las luces de TVH están disponibles en múltiples colores, perfiles y montajes. No todas las luces están disponibles en todos los colores, perfiles y montajes. Use la siguiente información para ordenar la luz correcta para su aplicación:

- Los colores disponibles son: ámbar (-A), azul (-B), transparente (-C), verde (-G) y rojo (-R)
- Los montajes disponibles son magnético (M), tubo (P) y permanente
- Los perfiles disponibles son altos (H) y bajos (L)

Si usted no puede encontrar la luz necesaria con la combinación de color, montaje y perfil, por favor póngase en contacto con un representante de ventas para ayuda.

Tous les Strobes sont protégés ont une garantie de 1 an.

Les lampes TVH sont disponibles en plusieurs couleurs, profilés et montés. Les lampes ne sont pas toutes disponibles dans toutes les couleurs, tous les profilés ou montés. Utilisez l'information ci-dessous afin de pouvoir commander la lampe appropriée pour votre application :

- Couleurs disponibles : ambre (-A), bleu (-B), clair (-C), vert, (-G) et rouge (-R).
- Montés disponibles: magnétique (M), montage sur tube (P) et époxy permanent
- Profilés disponibles : haut (H) et bas (L)

Si vous n'arrivez pas à trouver la combinaison désirée (couleur, monté et profilé), n'hésitez pas à contacter votre représentant.

METEORLITE 4 ▼

- UL approved

	Voltage	Dimensions (Diameter x Height)	Candle Power	Base & Mount	Flash Rate	Current Draw	Bulb
SY364002	12-24	2.38" x 5.16" (60mm x 131mm)	20mean	ABS & 2-hole	65±10 single fpm	0.50A max	SY360-0305 SY360-1156
SY364002M	12-24						
SY364004	36-48						
SY364004M	36-48						

METEORLITE 24 ▼

	Voltage	Dimensions (Diameter x Height x Depth)	Candle Power	Base & Mount	Flash Rate	Current Draw	Bulb
SY367302	12-24	5.50" x 2.65" x 2.25" (140mm x 67mm x 57mm)	20mean	ABS & 2-hole	65±10 single	0.25A max	SY360-1156 SY360-4305
SY367304	36-48						

METEORLITE 220 ▼

	Voltage	Dimensions (Diameter x Height)	Candle Power	Base & Mount	Flash Rate	Current Draw	Bulb
SY362302-A	12-24	4.62" x 5.90" (117mm x 150mm)	180mean	ABS & 3-hole	60±10 single fpm	2.50A max @ 12.8V 1.70A max @ 24V	SY362796
SY362302H-A	12-24	4.50" x 4.00" (114mm x 102mm)					

Rotating Beacons Faros Giratorios Gyrophares

METEORLITE 5700 ▼

- 2 year warranty
- Conforms to SAE J845
- Colors:
  Amber (-A)
  Blue (-B)
  Red (-R)
  Clear (-C)

	Voltage	Size (Diameter x Height)	Lamp	Base	Mount	Current Draw	Flash Rate
SY5700 SY5700VM	12	7.83" x 5.40" 199mm x 137mm	H1 55W, quartz halogen (SY12258)	Polycarbonate w/ foam mounting gasket	Permanent or vacuum magnetic	4.50A	90fpm

METEORLITE 550 ▼

- 1 year warranty
- Conforms to SAE J845 Class 1/CA Title 13
- Open parabolic design reflector
- Cord and lighter plug with on/off switch
- Weight: 2lb
- Colors:
  Amber (-A)
  Blue (-B)
  Red (-R)
  Clear (-C)

	Voltage	Size (Diameter x Height)	Lamp	Base	Mount	Current Draw	Flash Rate
SY55024H SY550MH	24 12	6.00" x 6.00" 152mm x 152mm	H1 55W, quartz halogen (SY12258) Replacement lens (SRPST02304)	Polycarbonate	Permanent mount with 24" pigtail Magnetic mount with 9' coil (SY550MH)	0.40A	100fpm

Mini Bars Mini Barras Bars Mini

METEORLITE 9360 Rotating Mini Bar

Voltage	Dimensions (Length x Width x Height)	Current Draw	Base	Mount	Flash Rate	Conforms to	Warranty
12	18.00" x 7.75" x 5.60" (457mm x 197mm x 142mm)	9.0A	Polycarbonate w/ foam mounting gasket	Permanent, magnetic, or vacuum magnetic	90fpm per rotating lamp module	SAE J845	1 year

Permanent Mount ▼	
SY9360-A	Amber
Magnetic Mount ▼	
SY9360M-A	Amber
Vacuum Magnetic Mount ▼	
SY9360VM-A	Amber

Magnetic Mount - Filtered Models ▼	
SY9360M-C-AC	Amber/clear
SY9360M-C-BA	Blue/amber
SY9360M-C-RA	Red/amber
SY9360M-C-RB	Red/blue
SY9360M-C-RC	Red/clear
SY9360M-C-RR	Red/red

METEORLITE 9340 Strobe Mini Bar



Voltage	Dimensions (Length x Width x Height)	Current Draw	Base	Mount	Flash Rate	Conforms to	Warranty
12-24	18.00" x 7.75" x 5.60" (457mm x 197mm x 142mm)	4.6A max @ 12.8V / 3.0A @ 24V	Polycarbonate w/ foam mounting gasket	Permanent, magnetic, or vacuum magnetic	70±10 Quad fpm per strobe light	SAE J1318	2 year

Permanent Mount ▼	
SY9340-A	Amber
Permanent Mount - Clear Dome Models ▼	
SY9340-C-AA	Amber/amber
SY9340-C-AC	Amber/clear
SY9340-C-AB	Amber/blue
SY9340-C-BB	Blue/blue

Magnetic Mount ▼	
SY9340M-A	Amber
Magnetic Mount - Clear Dome Models ▼	
SY9340M-C-AA	Amber/amber
SY9340M-C-AC	Amber/clear
SY9340M-C-AB	Amber/blue
SY9340M-C-BB	Blue/blue

Vacuum Magnetic Mount ▼	
SY9340VM-A	Amber
Vaccuum Magnetic Mount - Clear Dome Models ▼	
SY9340VM-C-AA	Amber/amber
SY9340VM-C-AC	Amber/clear
SY9340VM-C-BB	Blue/blue

Combination Lights Luces de Combinación Lampes de Combination

▼	Voltage	Side
SY83970	12	RH
SY83971	12	LH

▼	Voltage	Side
SY83972	12	RH
SY83973	12	LH

▼	Voltage	Side
SY83974	12	RH
SY87647	12	LH

Strobe & Flasher Accessories

Accesorios de Luces Estroboscópicas y Destelladores Accessoires pour Feux Stroboscopiques et Phares

▼	Description	Fits
SY360070	Strobe bracket - black	Series 1, 100, 9900
SY360071	Strobe bracket - yellow	Series 1, 100, 9900
SY360072	Suction cup mount kit	Series 1, 100, 200, 4, 5, 9900
SY360073	Magnet mount kit 3"diameter, 95lb pull	Series 1, 100, 200, 9900
SY360074	½" Pipe mount kit	Series 1, 100, 200, 400, 600, 800, 1600, 9900
SY360075	¾" Pipe mount kit	Series 1, 100, 200, 400, 600, 800, 1600, 9900
SY360076-A	Cigarette plug w/ 12' cord	Universal
SY360076-B	Cig plug w/ rocker switch 12' straight cord 8A fuse	Universal
SY360077	Guard - chrome	Series 1, 100, 9900

▼	Description	Fits
SY360077-BLK	Guard - black	Series 1, 100, 9900
SY360078	Vacuum/magnet mount kit	Series 2200 & 5700
SY360079	1" Pipe mount kit	Series 5700
SY360082H	Branch guard high dome	Series 2200
SY360082L	Branch guard low dome	Series 2200
SY361009	Bracket 5⁵⁄₁₆"height x 4"width x 3"depth	Series 4, 5, 6
SY361011	Guard	Series 4, 5, 6
SY361011L	Guard	Series 55
SY361013	Guard	Series 4, 5, 6

Strobe & Flasher Accessories

Accesorios de Luces Estroboscópicas y Destalladores Accessoires pour Feux Stroboscopiques et Phares

▼	Description	Fits
SY362000-P 	Mounting plate - Adaptor for mag, suction, pipe mount	Series 200
SY362003	Bracket	Series 200
SY365050	Hydraulic installation kit	ML 20
SY367011 	Guard	Series 24,25
SYBGH	Branch guard high dome	Series 2200

▼	Description	Fits
SYDCH	Dust cover high dome	Series 2200, 1600, 800, 600
SYLSK	Lighted switch kit	Universal
SYMMK	Mag mount kit with plug	Series 2200, 1600, 800, 600
SYSK	Switch	Universal

Auxiliary Lighting **Luces Auxiliares** Éclairage Auxiliare

PAR 36 Rubber Light
• 5" 127mm

	Voltage ▼	Sealed Beam
SY300012	12	4411
SY300024	24	4589
SY300036	36	4350
SY300048	48	4340

PAR 36 Rubber Light w/Guard
• 5" 127mm

	Voltage ▼	Sealed Beam
SY300112	12	4411
SY300124	24	4589
SY300136	36	4350
SY300148	48	4340

PAR 36 Rubber Light Kit
• 5" 127mm

	Voltage ▼	Sealed Beam
SY300212	12	4411
SY300224	24	4589
SY300236	36	4350
SY300248	48	4340

PAR 36 Steel Light
• 5" 127mm

	Voltage ▼	Sealed Beam
SY280012	12	4411
SY280024	24	4589
SY280036	36	4350
SY280048	48	4340

Auxiliary Lighting Luces Auxiliares Éclairage Auxiliare

PAR 36 Steel Light w/Guard
- 5" 127mm

	Voltage ▼	Sealed Beam
SY280112	12	4411
SY280124	24	4589
SY280136	36	4350
SY280148	48	4340

PAR 36 Steel Light Kit
- 5" 127mm

	Voltage ▼	Sealed Beam
SY280212	12	4411
SY280224	24	4589
SY280236	36	4350
SY280248	48	4340

Round Plastic Housing
- 5" 127mm

	Voltage ▼	Sealed Beam
SY290012	12	4411
SY290024	24	4589
SY290036	36	4350
SY290048	48	4340

Round Plastic Housing w/ Guard
- 5" 127mm

	Voltage ▼	Sealed Beam
SY290112	12	4411
SY290124	24	4589
SY290136	36	4350
SY290148	48	4340

Round Plastic Housing Light Kit
- 5" 127mm

	Voltage ▼	Sealed Beam
SY290212	12	4411
SY290224	24	4589
SY290236	36	4350
SY290248	48	4340

Rubber Halogen Sealed Beam 3x5
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x148mm

	Voltage ▼	Sealed Beam
SY500012	12	SY4360

Rubber Halogen Sealed Beam 3x5 w/Guard
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x148mm housing

	Voltage ▼	Sealed Beam
SY500112	12	SY4360

Rubber Halogen Sealed Beam 3x5 Light Kit
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x148mm

	Voltage ▼	Sealed Beam
SY500212	12	SY4360

Rubber Halogen 3x5
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x 148mm
- Colors Add -A (amber) / -B (blue) / -R (red)

	Voltage ▼	Sealed Beam
SY600012	12	SY360-12
SY600024	24	SY360-24
SY600036	36	SY360-36
SY600048	48	SY360-7048

Rubber Halogen 3x5 w/Guard
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x148mm
- Colors: A (amber) B (blue) / R (red)

	Voltage ▼	Sealed Beam
SY600112	12	SY360-12
SY600124	24	SY360-24
SY600136	36	SY360-36
SY600148	48	SY360-7048

Rubber Halogen 3x5 Light Kit
- 3³⁄₃₂"height x 5¹³⁄₁₆"width
- 79mm x148mm
- Colors: A (amber) B (blue) R (red)

	Voltage ▼	Sealed Beam
SY600212	12	SY360-12
SY600224	24	SY360-24
SY600236	36	SY360-36
SY600248	48	SY360-7048

Red Work Zone
- 6"length x 2¼"height x 2½"width
- 152mm x 58mm x 64mm

	Voltage ▼	Sealed Beam
SY549271	12-24	LED
SY549271-ALT	9-60	LED

Features:
- Emits red line for safe zone
- Mounting hardware included
- 100,000+ hours of operation
- Deutsch connector included

Work Lights Luces de Trabajo Phares de Travail

3" x 3" Flood Lights

- Housing: Black, durable shock resistant polymer
- Size: 3" x 3" (76mm x 76mm)
- Inclination: Vertical - up to 100° up and 45° down
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant
- Adjustable base

	Voltage ▼	Watts	Bulbs	Lens	Pattern	Mount
SY733112	12	35	SY700100	Glass	Flood	Pendent
SY733212	12	35	SY700100	Glass	Flood	Pedestal
SY733312	12	55	SY700400	Glass	Flood	Pendent
SY733412	12	55	SY700400	Glass	Flood	Pedestal
SY733124	24	35	SY700150	Glass	Flood	Pendent
SY733224	24	35	SY700150	Glass	Flood	Pedestal
SY733324	24	70	SY700500	Glass	Flood	Pendent
SY733424	24	70	SY700500	Glass	Flood	Pedestal
SY733136	36	35	SY700200	Glass	Flood	Pendent
SY733236	36	35	SY700200	Glass	Flood	Pedestal
SY733148	48	35	SY700300	Glass	Flood	Pendent
SY733248	48	35	SY700300	Glass	Flood	Pedestal

3" x 5" Pendant/Pedestal Mount

- Housing: Black, durable shock resistant polymer
- Size: 3" x 5" (76mm x 127mm)
- Inclination: Vertical - up to 100° up and 45° down
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant
- Adjustable base

	Voltage ▼	Watts	Bulbs	Lens	Pattern	Mount
SY700112	12	35	SY700100	Polycarbonate	Flood	Pendent
SY700212	12	35	SY700100	Polycarbonate	Flood	Pedestal
SY704312	12	55	SY700400	Glass	Flood	Pendent
SY704412	12	55	SY700400	Glass	Flood	Pedestal
SY714412	12	55	SY700400	Glass	Flood	Pedestal - hollow stud
SY700124	24	35	SY700150	Polycarbonate	Flood	Pendent
SY700224	24	35	SY700150	Polycarbonate	Flood	Pedestal
SY704324	24	70	SY700500	Glass	Flood	Pendent
SY704424	24	70	SY700500	Glass	Flood	Pedestal
SY714424	24	70	SY700500	Glass	Flood	Pedestal - hollow stud
SY700136	36	35	SY700200	Polycarbonate	Flood	Pendent
SY700236	36	35	SY700200	Polycarbonate	Flood	Pedestal
SY700148	48	35	SY700300	Polycarbonate	Flood	Pendent
SY700248	48	35	SY700300	Polycarbonate	Flood	Pedestal

3" x 5" Flush Mount Lights

- Housing: Black, durable shock resistant polymer
- Size: 3" x 5" (76mm x 127mm)
- Inclination: 5° angle
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant
- Adjustable base

	Voltage ▼	Watts	Bulbs	Lens	Pattern	Mount
SY701112	12	35	SY700100	Polycarbonate	Flood	Flush
SY705212	12	55	SY700400	Glass	Flood	Flush
SY701124	24	35	SY700150	Polycarbonate	Flood	Flush
SY705224	24	70	SY700500	Glass	Flood	Flush
SY701136	36	35	SY700200	Polycarbonate	Flood	Flush
SY701148	48	35	SY700300	Polycarbonate	Flood	Flush

3" x 5" Swivel Base Pendant

- Housing: Black, durable shock resistant polymer
- Size: 3" x 5" (76mm x 127mm)
- Inclination: Vertical up to 100° up and 45° down; Horizontal 30° left or right
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant

	Voltage ▼	Watts	Bulbs	Lens	Pattern	Mount
SY706112	12	55	SY700400	Glass	Flood	Swivel pendent
SY706124	24	70	SY700500	Glass	Flood	Swivel pendent

Work Lights Luces de Trabajo Phares de Travail

3 x 5 Lateral Mount

- Housing: Black, durable shock resistant polymer
- Size: 3" x 5" (76mm x 127mm)
- Inclination: Vertical up to 30° up or down; horizontal up to 135° left and 45° right (LH mount) and up to 135° right and 45° left (RH mount)
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant

	Voltage ▼	Watts	Bulb	Lens	Pattern	Mount
SY703112	12	35	SY700100	Polycarbonate	Flood	Lateral RH
SY703212	12	35	SY700100	Polycarbonate	Flood	Lateral LH
SY707312	12	55	SY700400	Glass	Flood	Lateral swivel RH
SY707412	12	55	SY700400	Glass	Flood	Lateral swivel LH
SY703124	24	35	SY700150	Polycarbonate	Flood	Lateral RH
SY703224	24	35	SY700150	Polycarbonate	Flood	Lateral LH
SY707424	24	70	SY700500	Glass	Flood	Lateral swivel LH
SY707524	24	70	SY700500	Glass	Flood	Lateral swivel RH
SY703136	36	35	SY700200	Polycarbonate	Flood	Lateral RH
SY703236	36	35	SY700200	Polycarbonate	Flood	Lateral LH
SY703148	48	35	SY700300	Polycarbonate	Flood	Lateral RH
SY703248	48	35	SY700300	Polycarbonate	Flood	Lateral LH

5 x 5 Flood Lights

- Housing: Black, durable shock resistant polymer
- Size: 5" x 5" (127mm x 127mm)
- Inclination: Vertical up to 90° up or 30° down
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant

	Voltage ▼	Watts	Bulb	Lens	Pattern	Mount
SY708001	12	55	SY700400	Glass	Flood	Pedestal
SY708013	12	55	SY700400	Glass	Spot	Pedestal
SY708051	24	70	SY700500	Glass	Flood	Pedestal
SY708063	24	70	SY700500	Glass	Spot	Pedestal

5 x 5 Shock & Vibration Resistant Flood Lights

- Housing: Black, durable shock resistant polymer
- Size: 5" x 5" (127mm x 127mm)
- Inclination: Vertical up to 90° up or 30° down
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant
- Specifically designed to withstand severe shocks & vibrations

	Voltage ▼	Watts	Bulb	Lens	Pattern	Mount
SY718001	12	55	SY700400	Glass	Flood	Pedestal
SY718002	12	55	SY700400	Glass	Flood	Lateral RH
SY718003	12	55	SY700400	Glass	Flood	Lateral LH
SY718013	12	55	SY700400	Glass	Spot	Pedestal
SY718051	24	70	SY700500	Glass	Flood	Pedestal
SY728002	24	70	SY700500	Glass	Flood	Lateral RH
SY728003	24	70	SY700500	Glass	Flood	Lateral LH

5 x 5 Magnetic Swivel Flood Lights

- Housing: Black, durable shock resistant polymer with built in handle
- Size: 5" x 5" (127mm x 127mm)
- Inclination: Vertical up to 90° up or 30° down
- Asymmetrical lens directs light to the ground
- Water, dust & vibration resistant
- Cord with cigarette lighter plug

	Voltage ▼	Watts	Bulb	Lens	Pattern	Mount
SY709005	12	55	SY700400	Glass	Flood	Magnetic swivel
SY709025	12	55	SY700400	Glass	Spot	Magnetic swivel
SY729005	12	100	SY700600	Glass	Flood	Magnetic swivel
SY729025	12	100	SY700600	Glass	Spot	Magnetic swivel

Work Lights Luces de Trabajo Phares de Travail

Headlight ▼		Voltage	Length	Width	Height
	SY83948	12	3.61" 92mm	3.26" 83mm	5.41" 137mm
	SY47522	12	4.67" 119mm	2.90" 74mm	4.60" 117mm
	SY40184	24	3.50" 89mm	3.50" 89mm	3.50" 89mm
	SY87643	36	4.13" 105mm	3.39" 86mm	3.70" 94mm
	SY87644	48	4.13" 105mm	3.39" 86mm	3.70" 94mm

Oval - LH Side Mount ▼		Voltage	Watts	Length	Width	Height	Bulb
	SY1702842	12	37	6.02" 153mm	4.26" 108mm	3.75" 95mm	GE862
	SY1702862	12	50	6.02" 153mm	4.26" 108mm	3.75" 95mm	GE886
Oval - Pedestal Mount ▼							
	SY1702152	12	24	5.50" 140mm	4.26" 108mm	5.11" 130mm	SY80551
	SY1700922	12	50	5.50" 140mm	4.26" 108mm	5.11" 130mm	GE886
	SY1800172	12	65	6.50" 165mm	4.25" 108mm	6.00" 152mm	SY9005-BULB
Oval - RH Side Mount ▼							
	SY1702852	12	37	6.02" 153mm	4.26" 108mm	3.75" 95mm	GE862
	SY1702872	12	50	6.02" 153mm	4.26" 108mm	3.75" 95mm	GE886
Oval - Vertical Side Mount ▼							
	SY1701202	12	37	3.75" 95mm	4.26" 108mm	6.02" 153mm	GE862

Work Lights Luces de Trabajo Phares de Travail

Rear Light ▼		Voltage	Length	Width	Height
	SY86994	12	4.75" 121mm	3.25" 83mm	5.75" 146mm

Rubber Work Light ▼		Voltage	Length	Width	Height
	SY610012	12	5.25" 133mm	3.50" 89mm	4.00" 102mm
	SY610024	24	5.25" 133mm	3.50" 89mm	4.00" 102mm
	SY610036	36	5.25" 133mm	3.50" 89mm	4.00" 102mm
	SY610048	48	5.25" 133mm	3.50" 89mm	4.00" 102mm

Work Light ▼		Voltage	Length	Width	Height
	SY56999	12	4.69" 119mm	2.90" 74mm	4.14" 105mm

		Voltage	Watts	Length	Width	Height	Description
	SY34441	12	55	5.24" 133mm	3.27" 83mm	4.17" 106mm	Right hand
	SY34442	12	55	5.24" 133mm	3.27" 83mm	4.17" 106mm	Left hand
	SY34585	12	55	5.24" 133mm	3.27" 83mm	4.17" 106mm	Rear

LED Work Lights Luces de Trabajo LED Lumières de Travail LED

SY2LWLO
- 12/48VDC
- 3.67" 93mm oval

SY4LWLR
- UL & cUL approved
- 12/48VDC
- 4.72" 120mm round oval

SY4LWLS
- UL & cUL approved
- 12/48VDC
- 4.33" 110mm square

LED Work Lights Luces de Trabajo LED Lumières de Travail LED

SYLEDECWL Series		Lumens ▼	Beam Pattern
	SYLEDECWLR	400	Flood
	SYLEDECWLS	400	Flood

- 12-24VDC
- 15W
- Mount: Pedestal with wire leads
- Current: 1.250A@12V / 0.625A@24V
- Aluminum housing and stainless steel bracket
- Polycarbonate lens
- IP66

SY5L & SY6L Series		Lumens ▼	Beam Pattern
	SY5LCWLS	500	Flood
	SY6LCWLR	500	Flood

- 12VDC
- 15W
- Housing: Cast aluminum alloy
- Lens: Polycarbonate with high light transmission
- Mount: Pedestal with wire leads
- Operating temperature: -40°C to +65°C

Par 36 LED Work Light		Lumens ▼	Beam Pattern
	SYWLED500-FL	500	Flood
	SYWLED500-SP	500	Spot
	SYWLED1000-FL	1000	Flood
	SYWLED1000-SP	1000	Spot

- 12-48VDC
- 6 Gen3 LEDs
- Light output: 500 lumens (SYWLED500 models)
  1000 lumens (SYWLED1000 models)
- Current: 1.3A@12.8V & 0.6A@25.6V & 0.3A@51.2V
  (500 lumen models)
  2A@12.8V & 1.1A@25.6V & 0.6A@51.2V
  (1000 lumen models)
- Color temperature: 5700K
- Viewing angle: Mounting bracket tilts forward or back 180° to angle the light where you need it
- Lens: Polycarbonate
- Housing: Die cast metal
- Size: 4.49"diameter x 5.66"height x 2.79"depth (measurement is with bracket)
- Operating temperature: -40°C to +65°C

SYHP Series		Lumens ▼	Beam Pattern
	SYHPLEDWL3200	3200	Flood
	SYHPLEDWL4800	4800	Flood

- 11-70VDC
- Current: 2.4A@12.8V / 1.2A@25.6V / 0.5A@60V (4 LED models)
  3.6A@12.8V / 1.8A@25.6V / 0.8A@60V (6 LED models)
- Output: 32W (4 LED models,) 48W (6 LED models)
- Base: Aluminum
- Size: 6.10" round or 4.90" square
- Mount: Wire leads & screw kit
- Operating temperature: -30°C to +70°C
- Waterproof connector
- IP68

LED Oval Work Light ▼	Description
SY1737572	Horizontal work light

- 12-48VDC
- 2A@12V .5A@48V
- 780 raw lumens; 400 effective lumens
- 5.85"height x 5.68"width x 3.51"depth
- 149mm x 144mm x 89mm
- Spot

LED Oval Work Light ▼	Description
SY1703462	Vertical work light
SY1703472	Vertical work light w/switch

- 12-48VDC
- 2A@12V / 0.5A@48V
- 780 Raw lumens; 400 effective lumens
- 7.58"height x 3.92"wide x 3.51"depth
- 193mm x 100mm x 89mm
- Spot

LED Oval Work Light ▼	Description
SY1706191	Vertical work light

- 12-48VDC
- 2A@12V 0.5A@48V
- 810 Raw lumens; 700 effective lumens
- 7.58"height x 3.92"width x 2.23"depth
- 193mm x 100mm x 57mm
- Spot

LED Work Lights Luces de Trabajo LED Lumières de Travail LED

LED 2x2 Work Light		Lumens ▼	Beam Pattern
	SY2X2-FL	950	Flood
	SY2X2-SP	950	Spot

- 12-24VDC
- 10W
- Current: 0.90A@12V / 0.40A@24V
- 2.60"height x 2.60"width x 2.56"depth
- Aluminum housing
- Mounting hardware stainless steel
- Tempered glass lens
- Pedestal mount with wire leads
- IP67

LED 2x2 Work Light		Lumens ▼	Beam Pattern
	SYLED1400R-FL	1440	Flood
	SYLED1400S-FL	1440	Flood

- 12-24VDC
- 27W
- Current: 1.00A@12V / 0.75A@24V
- 4.33"height x 4.33"width x 2.44"depth (square)
  4.56"diameter x 2.46"depth (round)
- Aluminum housing
- Mounting hardware stainless steel
- Pedestal mount with wire leads
- IP68, IP6K9K, SAEJ1455

LED Modules Modulos LED Modules LED

Portable - Magnet Mounts
- Mount: Magnetic backing
- LEDs per head: 18
- Voltage: 4AA batteries (not included)
- Battery run time: Minimum 24 hours continuous
- Flash patterns: 2
  - Steady on
  - Flash

▼	Dimensions (Length x Height x Width)	Colors
SYTE2-0524-A	6.50" x 4.00" x 1.50" (165mm x 102mm x 38mm)	Amber (-A)
SYTE2-0524-R		Red (-R)

High Intensity LED Modules
- Mount: flange or rubber grommet
- Power supply: Epoxy encapsulated
- Lens: Polycarbonate, 2 screws
- Multi-module synchronization
- Simultaneous or alternate flashing
- Built in selectable flash patterns
- Interior and exterior use
- Conforms to SAE J1318, E13
- 5 year limited warranty
- Colors: Amber, blue, clear, red

▼	Warning Modes	Dimensions (Length x Height x Width)	Current Draw	Voltage	LEDs per head
SYLED03-A	12	3.80" x 1.60" x 1.30" (97mm x 41mm x 33mm)	0.35A	12 or 24	3

Blue LED Back Up Lights Luz LED de Retroceso Azul Feux de Recul Blue LED

Provides highly visible blue warning light to alert pedestrians of approaching machinery before it is heard in warehouse environments

Ideal for industrial vehicles used in close proximity to pedestrians

Helps minimize accidents

Provee una luz azul intensa que alerta a los peatones cuando un vehículo se aproxima, mucho antes de que estos puedan escucharlo (almacén)

Ideal para vehículos industriales usados cerca de áreas peatonales

Permite minimizar el número de accidentes

Fourni une lumière bleue très visible pour avertir les piétons de l' approche de machinerie avant qu' on puisse l' entendre dans un environment d' entrepot bruyant

Idéale pour équipements industriel opérant dans des zones fréquenter par piétons

Aide à diminuer les accidents

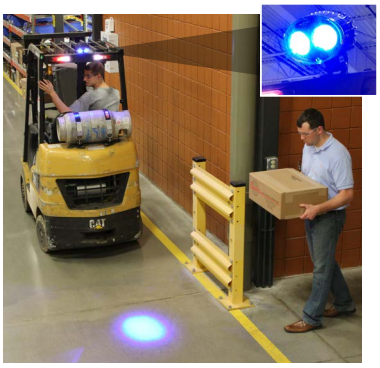

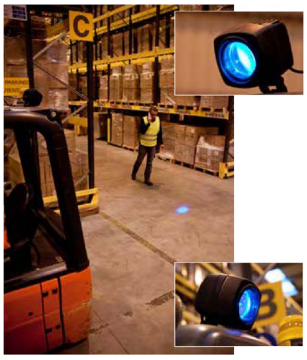

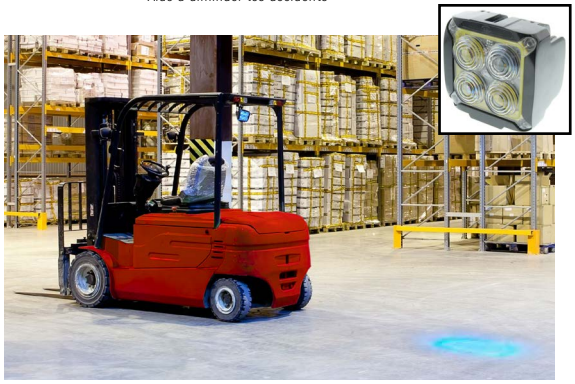

- 12-110VDC
- Spot beam pattern
- UV-resistant polycarbonate lens cover
- Tough polycarbonate housing prevents rust & corrosion
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs
- Universal pedestal mount
- Mounting hardware: (x1) M10 - 1.5 x 20mm
- Connector: flush, integrated Deutsch
- Wire assembly now included (or order SY83988 separately)
- Size: 5.86"height x 5.68"width x 4.27"length
  149mm x 144mm x 108mm
- SAE J1455
- UL recognized
- ECE Reg. 10 (EMI)
- IP69K
- SAE J1455
- ECE Reg. 10 (EMI)

	Description
SY83955	Blue LED spotlight
SY83989	Red LED spotlight
SY83988	Wire assembly
SY83989-AROW	Blue LED spotlight with arrow
SY83989-AROW	Red LED spotlight with arrow

- 12-100VDC
- Spot beam pattern
- Pedestal mount
- Wire harness assembly included
- IP 68- IP69K
- Polycarbonate lens cover

	Description
SY83955-E	Blue LED spotlight

- 12-48V DC
- Mounting type: Universal heavy duty mount
- IP67, ECE Reg. 10, SAE J1455, CE recognized

	Description
SY83955-ALT	Blue LED spotlight

- 12-48VDC
- 150 Lumens
- 10W
- IP67, SAE J1455, CE
- Die cast aluminum housing
- Mounting: Single drill hole to accommodate for mounting bracket

	Description
SY83955-HD	Blue LED spotlight
SY83989-HD	Red LED spotlight

Headlight Assemblies Asambleas de Luces Delanteras Assemblages de Feux Avants

		Length Overall	Center to Center Length	Height Overall	Center to Center Height	Lens	Voltage
SY77532	Left	8.63" 219mm	8.06" 205mm	4.14" 105mm	3.56" 90mm	Polycarbonate	12
SY77820	Right	8.63" 219mm	8.06" 205mm	4.14" 105mm	3.56" 90mm	Polycarbonate	12

Rear Lights Luces Traseras Feux Arrières

	Length	Width	Height	**Voltage**	Connectors	Pins	Mounting Location
SY83949	4¼" 108mm		2¹⁄₁₆" 52mm	12	0	3	Left or right
SY78987	5½" 139mm			12	0	0	Left or right
SY78985	6¼" 159mm	2½" 64mm	2" 51mm	12	1	4	Left
SY78990	6¼" 159mm	2½" 64mm	2" 51mm	12	1	4	Right
SY83950	6½" 165mm	2¼" 57mm	2⅜" 60mm	12	0	3	Left or right

Rear Lights Luces Traseras Feux Arrières

	Length	Width	Height	Voltage ▼	Connectors	Pins	Mounting Location
SY87642	7½" 191mm	1¾" 44mm	1⅞" 48mm	12	1	0	Left or right
SY86990	8" 203mm	2 1/16" 52mm	2" 51mm	12	1	0	Left or right
SY371012	8¼" 210mm	2" 51mm	2¼" 57mm	12	0	5	Left or right
SY38889	8¼" 210mm	2¼" 57mm	2 5/16" 59mm	12	1	0	Left or right
SY81426	8⅜" 213mm	2 1/32" 52mm	2 5/16" 59mm	12	1	2	Left or right
SY81547	8⅜" 213mm	2 3/64" 52mm	2 5/16" 59mm	12	1	0	Left or right
SY108170	8⅜" 213mm	2 1/32" 52mm	2 5/16" 59mm	12	1	2	Left or right
SY47524	8⅜" 213mm	2 1/32" 52mm	2 5/16" 59mm	12	1	2	Left or right

Rear Lights Luces Traseras Feux Arrières

	Length	Width	Height	Voltage ▼	Connectors	Pins	Mounting Location
SY86995	8½" 216mm	2⅛" 55mm	1 15/16" 49mm	12	1	0	Left or right
SY86993	8⅞" 225mm	2½" 64mm	2" 51mm	12	1	2	Left or right
SY87635	9⅛" 232mm	1¾" 44mm	2 7/16" 62mm	12	2	3	Left or right
SY87651	10¼" 260mm	2" 51mm	2⅛" 54mm	12	1	0	Left or right
SY87655	11 5/16" 303mm	3⅛" 79mm	3 35/64" 90mm	12	1	0	Left
SY83952	11 5/16" 303mm	3⅛" 79mm	3 35/64" 90mm	12	1	0	Left
SY83951	15 45/64" 399mm	3⅛" 79mm	3 35/64" 90mm	12	1	0	Right
SY83953	15 45/64" 399mm	3⅛" 79mm	3 35/64" 90mm	12	1	0	Right

Rear Lights Luces Traseras Feux Arrières

	Length	Width	Height	Voltage ▼	Connectors	Pins	Mounting Location
SY87637	9⅛" 232mm	1¾" 44mm	2⁷⁄₁₆" 62mm	24	2	3	Left or right
SY371036	8¼" 210mm	2" 51mm	2¼" 57mm	36	0	4	Left or right
SY71879	8⅜" 213mm	2¹⁄₃₂" 52mm	2⁵⁄₁₆" 59mm	36	1	2	Left or right
SY87636	9⅛" 232mm	1¾" 44mm	2⁷⁄₁₆" 62mm	36	2	3	Left or right
SY33328	11¹³⁄₃₂" 290mm	2" 51mm	3 ¹⁵⁄₃₂" 88mm	36	3	0	Right
SY371048	8¼" 210mm	2" 51mm	2¼" 57mm	48	0	4	Left or right
SY87295	9⅛" 232mm	1¾" 44mm	2⁷⁄₁₆" 62mm	48	2	3	Left or right
SY87654	10⁵⁄₁₆" 262mm	2³¹⁄₃₂" 75mm	2¹³⁄₆₄" 56mm	48	1	0	Left or right
SY33327	11¹³⁄₃₂" 290mm	2" 51mm	3¹⁵⁄₃₂" 88mm	48	3	0	Right

Rear Lights Luces Traseras Feux Arrières

LED Rear Combination Lights

- 7.45"length x 1.93"width x 1.61"height 189mm x 49mm x 41mm
- Acrylic lens resists scratching & scuffing
- Rugged solid state LEDs can withstand shock & vibration
- Sturdy ABS housing
- Low profile mount
- UL Recognized

	Current Draws	Voltage ▼	Description	Connection
SY83969	0.11A (Stop); 0.02A (Tail); 0.11A (Turn); 0.09A (Back Up)	12	1 - Stop-Tail-Turn	Integrated packard socket
SY1220016	0.105A (Stop); 0.020A (Tail); 0.105A (Turn); 0.090A (Backup)	12	1 - Stop-Tail-Turn	Integrated packard socket

- 8.5"length x 1.95"width x 1.10"height 216mm x 50mm x 30mm
- UV-resistant polycarbonate lens
- Rugged solid state LEDs can withstand shock & vibration
- Sturdy ABS housing
- Low profile mount
- UL Recognized
- IP67

	Current Draws	Voltage ▼	Description	Connection
SY80500	0.4A	12	1 - Stop-Tail-Turn	DT06-4S
SYL370012	0.4A	12	1 - Stop-Tail-Turn	12" bare leads
SYL370048	0.4A	48	1 - Stop-Tail-Turn	12" bare leads

LED Rear Combination Light Kit

- 8.5"length x 1.95"width x 1.10"height 216mm x 50mm x 30mm
- UV-resistant polycarbonate lens
- Rugged solid state LEDs can withstand shock & vibration
- Sturdy ABS housing
- Low profile mount
- UL recognized
- IP67
- 2 rear lights and 1 flasher (SYL379999)

	Current Draws	Voltage ▼	Description	Connection
SYL370012K	0.4A	12	2 - Stop-Tail-Turn w/flasher	12" bare leads
SYL372436K	0.4A	24/36	2 - Stop-Tail-Turn w/flasher	12" bare leads
SYL370048K	0.4A	48	2 - Stop-Tail-Turn w/flasher	12" bare leads
SYL379999			1 flasher	

Rear Lights Luces Traseras Feux Arrières

METEORLITE 38 Brake-Tail Light

	Voltage ▼	Information
SY380012	12	
SY380024	24	
SY380036	36	
SY380048	48	

METEORLITE 38 Back Up Light

	Voltage ▼	Information
SY380212	12	
SY380224	24	
SY380236	36	
SY380248	48	
SY367011		Light guard

METEORLITE 38 Stop-Tail-Turn Light

	Voltage ▼	Information
SY380412	12	
SY380424	24	
SY380436	36	
SY380448	48	
SY380400		Light guard

Indicator Lights Luces Indicadoras Voyants

	Length	Width	Height	Diameter	Voltage ▼	Connectors	Pins	Mounting Location
SY86992	3" 76mm	3" 76mm	2⅞" 73mm		12	1	0	Right or left
SY83954	6½" 165mm	1 15/16" 49mm	2¼" 57mm		12	0	3	Right or left
SY87634			3⅜" 86mm	3½" 89mm	12	1	0	Right or left
SY35684	7½" 191mm	2 15/16" 75mm	3¼" 83mm		48	1	0	Right or left

Mini Indicator Lights Mini Luces Indicadores Mini-Voyants

		Description	Lens Color	Voltage ▼	Terminals
	SY95592	LED dash	Green	2	Wire
	SYJS-3058	Incandescent dash	Red	12	Blade
	SY77365	Indicator light	Red	12	Wire
	SY95597	Light	Green	12	Blade
	SY95590	LED dash	Red	24	Wire
	SY95593	Incandescent dash	Red	24	Blade
	SY95599	Incandescent dash	Green	24	Blade
	SY95591	Incandescent dash	Red	28	Wire
	SY95601	Incandescent dash	Green	28	Wire
	SY95594	Indicator light	Green	125	Blade
	SY95595	Light	Blue	125	Blade

Light Bulbs Bombillas Ampoules

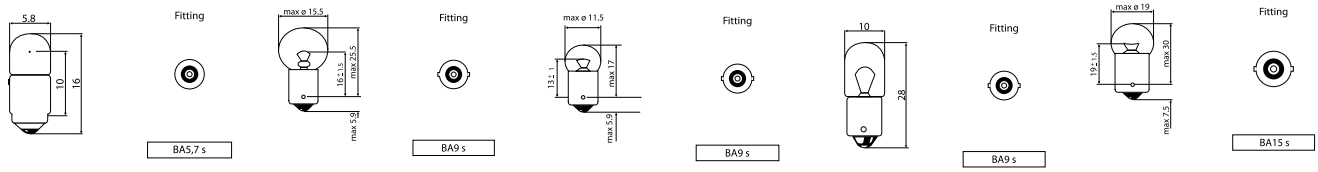

B12 **B21** **B24** **B25** **B31**

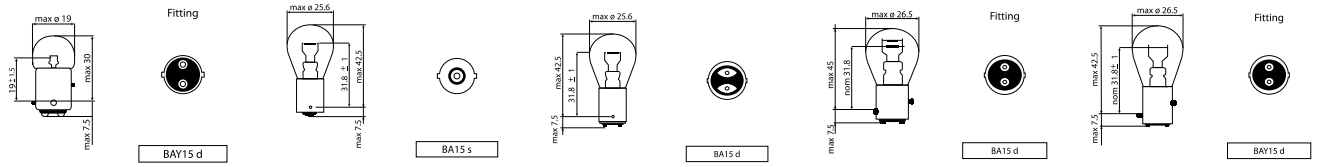

B34 **B41** **B43** **B53** **B55**

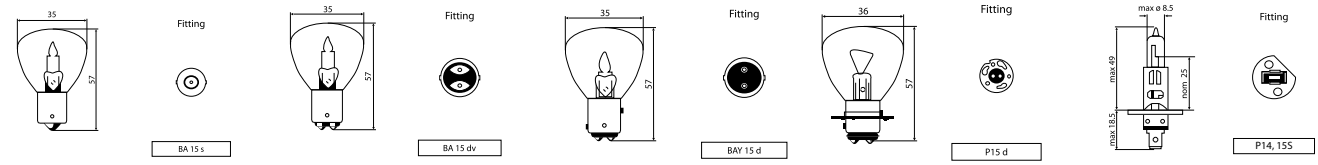

B61 **B62** **B64** **B67** **H11**

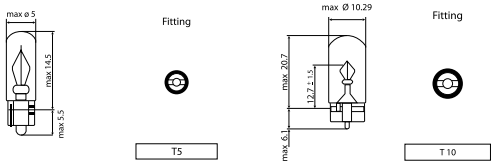

W1 **W2**

	Type ▼	Bulb Type	Voltage	Watts
SY360-0386	B12	386	14	1.00
SY360-0057	B21	57	14	3.36
SY360-1895	B21	1895	14	3.78
SY360-0456	B21	456	28	4.76
SY360-0053	B24	53	14	1.73
SY360-1893	B25	1893	14	4.62
SY360-0067	B31	67	14	7.97
SY360-0097	B31	97	14	9.32
SY38811	B31	1251	28	6.44
SY360-6936	B31		36	10.00
SY360-6948	B31		48	10.00
SY51909	B34		48	10.00
SY88290	B34		36	8.00
SY52779	B41	1141	13	18.43
SY360-1073	B41	1073	12	23.04
SY360-0305	B41	305	28	14.28
SY360-1156	B41	1156	13	26.90
SY360-1076	B43	1076	13	23.04
SY360-1638	B43	1638	28	28.56

	Type ▼	Bulb Type	Voltage	Watts
SY360-1229	B43	1229	40	15.00
SY88291	B43		48	25.00
SY360-1034	B53	1034	12	23.04 / 8.26
SY360-1157	B53	1157	12	26.88 / 8.26
SY360-7024	B53		24	21.00 / 5.00
SY360-7036	B53		36	25.00 / 10.00
SY40153	B55		24	25.00
SY360-6000	B55		36	25.00
SY360-6010	B55		48	25.00
SY360-1195	B61	1195	13	37.50
SY71115	B61		24	60.00
SY360-1062	B62	1062	40	36.80
SY53201	B64		48	40.00
SY88236	B64		36	40.00
SY51906	B67		48	25.00
SY34027	E37		14	1.26
SY54945	W1		12	1.20
SY360-194	W2	194	14	3.78

Miscellaneous Light Bulbs **Bombillas Misceláneos** Diverses Ampoules

	Bulb Type ▼	Voltage	Watts	Description
SYMH1000U	Metal halide		1000	
SYSP1	SP1	36	10	
SYSP2	SP2	48	10	
SYSP5	SP5	36	30	
SYSP6	SP6	48	36	
SYSP7	SP7	36	25	
SYSP8	SP8	48	25	
SYSP14	SP14	36	10	

	Bulb Type ▼	Voltage	Watts	Description
SYSP15	SP15	48	10	
SY82942	1156 LED	12		1.89" 48mm tall
SY82943	1157 LED	12		1.89" 48mm tall
SY360-1683	1683	28	29	BA15s base
SY360-1816	1816	13	4	BA9s base
SY360-3157	3157	13 14	27 8	Wedge base
SY80551	PS24W	12	25	

Replacement Halogen Bulbs

Bombillas Halógenas de Repuesto Ampoules Halogènes de Rechange

	Bulb Type	**Voltage ▼**	Watts
SY700100	H3	12	35
SY700400	H3	12	55
SY700600	H3	12	100
SY108169	H3	12	55
SY12258	H1	12	55
SY12454	H1	12	100
SY360-0894	894	12	38
SY9005-BULB	9005	12	65
SYH9007	9007	12	65/55
SY360-0862	862	13	38
SY360-0886	886	13	50
SY360-0889	889	13	27
SY83964	H3	15	50
SY700150	H3	24	35
SY83965	H3	24	55
SY700500	H3	24	70
SY13258	H1	24	70
SY700200	H3	36	35
SY83966	H3	36	45
SY700300	H3	48	35
SY88293	H3	48	45
SY83967	H3	48	60
SY83968	H3	80	55

Fluorescent Bulbs **Bombillas Fluorescentes** Ampoules Fluorescentes

SY87657
- 18W
- 4-pin (2G11) base

SY40091
- 27W
- 4-pin (2G11) base

SY87658
- 13W
- Miniature bi-pin (G5) base

Par 36/Sealed Beam Light Bulbs **Bombillas de Rayo Selladas Par 36** Ampoules Halogènes Scellées

	Voltage ▼	Watts	Terminals	Beam	Type
SY4411	12	35	2 slip on terminals	Trapezoid	GE Original
SY4411-3	12	35	2 slip/ screw terminals	Trapezoid	GE Original
SY4411-S	12	35	2 screw terminals	Trapezoid	GE Original
SY4411-E	12	35	2 slip on terminals	Trapezoid	Economy
SYH7606	13	50	2 screw terminals	Flood	GE Original
SYH7610	13	50	2 screw terminals	Trapezoid	GE Original
SY4700	13	100	3 screw terminals	Spot flood	GE Original
SY4589	28	50	2 slip on terminals	Trapezoid	GE Original

	Voltage ▼	Watts	Terminals	Beam	Type
SY4589-1	28	50	2 screw terminals	Trapezoid	GE Original
SY4589-E	28	50	2 slip on terminals	Trapezoid	Economy
SY4589-1-E	28	50	2 screw terminals	Trapezoid	Economy
SY4350-E	36	60	2 slip on terminals	Trapezoid	Economy
SY4350	36	60	2 slip on terminals	Trapezoid	GE Original
SY4340-E	48	80	2 slip on terminals	Trapezoid	Economy
SY4340	48	80	2 slip on terminals	Trapezoid	GE Original

Par 36/Sealed Beam Light Bulbs **Bombillas de Rayo Selladas Par 36** Ampoules Halogènes Scellées

Par 36 LED

- 12-48VDC
- Die cast aluminum housing
- Replaces PAR36 lights
- Blade terminals
- Diameter: 4.45" (113mm)

		Lumens ▼	Beam Pattern	Lens	Can Replace
	SY83962	960 raw lumens, 520 effective lumens	Flood	Polycarbonate	4406-12V, 4414-12V, 4593-24V, 4340-48V, 4350-36V
	SY83963	1,050 raw lumens, 770 effective lumens	Trapezoid	Glass	4411-12V, 4589-24V, 4350-36V, 4340-48V

Par 46/Sealed Beam Light Bulbs **Bombillas de Rayo Selladas Par 46** Ampoules Halogènes Scellées

		Voltage ▼	Watts	Terminals	Beam
	SY4419	13	35	2 screw terminals	Trapezoid
	SY4413	13	35	2 screw terminals	Flood
	SYH7609	13	50	2 screw terminals	Flood
	SYH7619	13	50	2 screw terminals	Trapezoid

Rectangular Halogen Light Bulbs **Bombillas Halógenas Rectangulares** Ampoules Halogènes Rectangulaires

		Voltage ▼	Watts	Terminals
	SYH4360	13	38	2 right angle lugs
	SYH9406	13	50	2 right angle lugs
	SYH6054	13	65/35	3 contact lugs

Gauges Medidores Jauges

		Description ▼	Voltage	With Lockout
	SY382020	Ammeter	12	
	SY77476	Ammeter	12	
	SY77484	Ammeter	12	
	SY88455	Ammeter	12	
	SY1222132	Ammeter		
	SY1222134	Ammeter		
	SY1222138	Ammeter DC		
	SY1222133	Ammeter DC		
	SY88644	Battery capacity indicator	24	No

		Description ▼	Voltage	With Lockout
	SY6357	Battery capacity indicator	24	
	SY6359	Battery capacity indicator	36-48	
	SY730G12	Battery capacity indicator	12	Yes
	SY711G12	Battery capacity indicator	12	No
	SY711G24	Battery capacity indicator	24	No
	SY730G24	Battery capacity indicator	24	Yes
	SY730G36	Battery capacity indicator	36	Yes
	SY711G36	Battery capacity indicator	36	No
	SY711G48	Battery capacity indicator	48	No
	SY730G48	Battery capacity indicator	48	Yes
	SY711G72	Battery capacity indicator	72	No
	SY730G72	Battery capacity indicator	72	Yes
	SYHB8260R12	Battery capacity indicator	12	
	SYHB8260R24	Battery capacity indicator	24	
	SYHB8260R36	Battery capacity indicator	36	
	SYHB8260R48	Battery capacity indicator	48	

Gauges Medidores Jauges

		Description ▼	Voltage	With Lockout
	SYHB8270R12	Battery capacity indicator	12	
	SYHB8270R24	Battery capacity indicator	24	
	SYHB8270R36	Battery capacity indicator	36	
	SYHB8270R48	Battery capacity indicator	48	
	SYHB8280R12	Battery Capacity Indicator	12	
	SYHB8280R24	Battery capacity indicator	24	
	SYHB8280R36	Battery capacity indicator	36	
	SYHB8280R48	Battery capacity indicator	48	
	SYHB8550R12	Battery capacity indicator w/hour meter	12	
	SYHB8550R24	Battery capacity indicator w/hour meter	24	
	SYHB8550R36	Battery capacity indicator w/hour meter	36	
	SYHB8550R48	Battery capacity indicator w/hour meter	48	
	SY803RB2436	Battery charge indicator	36	
	SY83084	Battery charge indicator	36-48	
	SY802RB12BN	BDI	12	
	SY802RB2436BN	BDI	24-36	
	SY802RB2448BN	BDI	24-48	
	SY802RB3648BN	BDI	36-48	
	SY803RB12BCJ	BDI	12	Yes
	SY803RB2436BCJ	BDI	24-36	Yes
	SY803RB2448BCJ	BDI	24-48	Yes
	SY803RB2448BCK 3010	BDI	24-48	Yes
	SY803RB3648BCJ	BDI	36-48	Yes

		Description ▼	Voltage	With Lockout
	SY906T36BN	Battery charge indicator	36	
	SY906T12BN	BDI	12	
	SY906T24BN	BDI	24	
	SY906T48BN	BDI	48	
	SY906T24HN	Battery charge indicator	24	
	SY99802	Battery discharge		
	SY1222129	Battery discharge		
	SY1222128	Battery discharge		
	SY1222135	Battery discharge		
	SY1222137	Battery discharge		
	SY96735	Battery gauge	48	No
	SY88274	Battery indicator	24	
	SY2114R12	BDI	12	
	SY2114R24	BDI	24	
	SY77474	BDI	36	
	SY1222241	BDI	24	
	SY1222242	BDI	48	

Gauges Medidores Jauges

	Description ▼	Voltage	With Lockout
SY77475	BDI	48	
SY77482	BDI		
SY77489	BDI		
SY78814	BDI	10-14	
SY80920	BDI		
SY88278	BDI	24	
SY88288	BDI	36	
SY900R12BN	BDI	12	
SY900R24BN	BDI	24	
SY900R36BN	BDI	36	
SY900R48BN	BDI	48	
SY900R96BN	BDI	96	
SY900R96HG	BDI	96	
SY933/1C243648	BDI	24-48	
SY78918	BDI	12	
SY78910	BDI - LED	24	
SY78925	BDI	36	No

	Description ▼	Voltage	With Lockout
SY13260	BDI	12-72	
SY13260-R	BDI	12-72	
SY78926	BDI	24	No
SY78919	BDI	36	
SY78927	BDI	48	
SY902RB1224BN	BDI	12-24	
SY902RB2436 BNAAC	BDI	24-36	No
SY96851	BDI - 933 digital display	12-72	
SY83310	BDI (for VRLA batteries)	24-36	No
SY78917	BDI controller	12-48	
SY933/3D2436AW	BDI controller	12-48	
SY78916	BDI controller	24	
SY933/3D24	BDI controller	24	
SY933/3D2436	BDI controller	24-36	
SY78892	BDI controller	36	
SY933/3D36	BDI controller	36	
SY933/3D3648	BDI controller	36-48	
SY933/3D48	BDI controller	48	

Gauges Medidores Jauges

	Description ▼	Voltage	With Lockout
	SY900R72BN	BDI - LED	72	
	SY78928	BDI kit	12	
	SY78911	BDI kit	24	
	SY78920	BDI kit	36	
	SY933-3-24V	BDI kit - includes: 1-SY13260 1-SY933/3D24	24	
	SY933-3-36V	BDI kit - includes: 1-SY13260 1-SY933/3D36	36	
	SY933-3-3648V	BDI kit - includes: 1-SY13260 1-SY933/3D3648	36-48	
	SY933-3-48V	BDI kit - includes: 1-SY13260 1-SY933/3D48	48	
	SY78912	BDI	12	Yes
	SY78909	BDI	24	Yes
	SY78913	BDI	36	Yes
	SY78921	BDI	48	Yes
	SY78914	BDI	12	No
	SY78915	BDI	24	No
	SY78923	BDI	36	No
	SY78929	BDI	48	No
	SY78922	BDI	72	Yes
	SY78948	Display	36-48	
	SY31239	Display		
	SY1244445	Display		

	Description ▼	Voltage	With Lockout
	SY1244446	Display		
	SY23043	Fuel level	12	
	SY31505	Fuel level	12	
	SY32040	Fuel level	12	
	SY34365	Fuel level	12	
	SY34366	Fuel level	12	
	SY385200	Fuel level	12	
	SY39897	Fuel level	12	
	SY88389	Fuel level	12	

Gauges Medidores Jauges

	Description ▼	Voltage	With Lockout
SY88390	Fuel level	12	
SY88392	Fuel level	12	
SY88397	Fuel level	12	
SY1222954	Hour meter	12-48	
SY44212	Instrument panel		
SY88590	Instrument assembly		
SY105218	MDI display	24	
SY83046	Multi function	24-80	

	Description ▼	Voltage	With Lockout
SY1222136	Meter volt bound watershed	24	
SY382500	Oil Gauge		
SY32042	Oil pressure	12	
SY34364	Oil pressure	12	
SY88382	Oil pressure	12	
SY88386	Oil pressure	12	
SY88401	Oil pressure	12	
SY1222955	Oil pressure	12	

Gauges Medidores Jauges

	Description ▼	Voltage	With Lockout
SY77487	Oil temperature	12	
SY77481	Oil temperature-sight level	12	
SY36750	Pressure	12	
SY9709	Sight		
SY9729	Sight		
SY31507	Temperature	12	
SY45826	Temperature	12	
SY51911	Temperature	12	

	Description ▼	Voltage	With Lockout
SY88387	Temperature	12	
SY88393	Temperature	12	
SY88395	Temperature	12	
SY88396	Temperature	12	
SY88398	Temperature	12	
SY88399	Temperature	12	
SY32535	Traction display		
SY1222956	Transmission temperature		

Gauges Medidores Jauges

	Description ▼	Voltage	With Lockout
SY6358	Volt		
SY1222958	Volt	12	
SY77477	Volt		
SY77479	Volt		
SY1222130	Volt		
SY32041	Water temperature	12	

	Description ▼	Voltage	With Lockout
SY33000	Water Temperature	12	
SY385101	Water temperature	12	
SY41803	Water temperature	12	
SY88394	Water temperature	12	
SY1222957	Water temperature	12	
SY1222959	Water temperature	12	

Gauge Kits Kits de Medidores Kits de Jauges

- 12V, negative ground
- Glass lens
- Fits a standard 2" (51mm) cutout
- Mounting hardware included
- Kits include 1 gauge and 1 sender

- 12V, Conexión Negativa
- Vidrios
- Se Ajusta al Corte Estándar de 2" (51mm)
- Material de Montaje Incluido
- El Kit Incluye 1 Medidor y 1 Remitente

- 12V Sol Négatif
- Lentilles de verre
- Correspond au standard 2" (51mm)
- Matériel de Montage Inclus
- Les kits comprennent 1 Jauge et 1 Expéditeur

Ammeter ▼

SY382020	Gauge
SY382020D	Gauge
SY88439	Gauge kit with sender

Fuel level ▼

SY385200	Gauge
SY385200D	Gauge
SY332348	Sender
SY332348D	Sender
SY382348	Gauge kit with sender
SY382348-D	Gauge kit with sender

Oil Pressure ▼

SY382500	Gauge
SY382500D	Gauge
SY334178	Sender
SY334178D	Sender
SY388574	Gauge kit with sender
SY388574D	Gauge kit with sender

Temperature ▼

SY385101	Gauge
SY385101D	Gauge
SY333529	Sender
SY333529D	Sender
SY383529	Gauge kit with sender
SY383529-D	Gauge kit with sender

Senders Remitentes Expéditeurs

	Function ▼
SY31295	Brake pressure

	Function ▼
SY45033	Low coolant

	Function ▼
SY365007	Oil pressure

SY332348	Fuel

SY80617	Low pressure

SY38481	Oil pressure

SY31979	Fuel

SY48090	Oil pressure

SY45298	Oil pressure

SY45295	Fuel



SY88343	Oil pressure

SYM-4012	Oil pressure



SY88403	Fuel

SY23076	Oil pressure

80 PSI / 33.5-240 Ohm

SY23057	Oil pressure

SY88405	Fuel

SY334175	Oil pressure

SY31517	Oil pressure

SY39880	Fuel



SY334178	Oil pressure

SY36715	Oil pressure



Senders Remitentes Expéditeurs

	Function ▼
SY88433	Oil pressure

	Function ▼
SY38850	Oil pressure

	Function ▼
SY82306	Oil pressure

	Function ▼
SY1244427	Oil pressure

	Function ▼
SY1210793	Oil pressure

	Function ▼
SY41709	Oil temperature

	Function ▼
SY99480	Pressure

6 PSI 3 terminal
1/8 NPT threads

	Function ▼
SY99909	Pressure

4 PSI - 3 terminal
1/8 NPT threads

	Function ▼
SY48089	Pressure

	Function ▼
SY1244426	Pressure

	Function ▼
SY1128	Pressure

	Function ▼
SY44679	Pressure

	Function ▼
SY99704	Pressure

	Function ▼
SY76199	Pressure

	Function ▼
SY1210328	Pressure

	Function ▼
SY33086	Pressure



	Function ▼
SY108134	Pressure

	Function ▼
SY38911	Stop

	Function ▼
SY88407	Switch

	Function ▼
SY88412	Switch

	Function ▼
SY36830	Switch

	Function ▼
SY108168	Temperature

SY108175	Temperature

SY32011	Temperature

SY333525	Temperature

SY333529	Temperature

SY44793	Temperature

SY45072	Temperature

	Function ▼
SY51962	Temperature

SY88431	Temperature

SY107587	Temperature

SY29420	Temperature

SY31981	Temperature

SY333527	Temperature

SY38317	Temperature

	Function ▼
SY43661	Temperature

SY44187	Temperature



SY88404	Temperature

SY88408	Temperature

SY88409	Temperature

SY88429	Temperature

SY88432	Temperature

Senders Remitentes Expéditeurs

	Function ▼
SY31975	Temperature

	Function ▼
SY88416	Temperature

	Function ▼
SY33001	Temperature

SY32626	Temperature

SY88428	Temperature

SY33019	Temperature

SY39665	Temperature

SY88419	Temperature

SY81776	Water temperature

SY48083	Temperature

SY37058	Temperature



SY88414	Temperature

SY46490	Temperature

Hour Meters & Kits **Medidores y Kits** Horamètre

▼	Voltage	Lens Type	Display	Terminals	Polarity Protected	UL
SY700FN2448	9-60		Digital	2	No	
SY700QN2448	24-48	Glass	Digital			
SY700TN00101248	18-60	Glass	Digital	2		
SY701QN1248	12-48	Glass	Digital	3	Yes	Yes
SY701RN2448	12-48	Glass	Digital	2	Yes	Yes
SY701TN2448	9-60	Plastic	Digital	4	No	No
SY771	10-80	Plastic	Analog	2	Yes	Yes
SY776	10-80	Plastic	Analog	2	Yes	Yes

▼	Voltage	Lens Type	Display	Terminals	Polarity Protected	UL
SY15186	10-80	Plastic	Analog	2	Yes	Yes
SY31504		Plastic	Analog	2	No	No
SY34368			Analog	2	Yes	No
SY34369	36-80	Glass	Analog	2	Yes	Yes
SY34370	12-60	Glass	Analog	2	Yes	Yes
SY34371	12-60	Glass	Analog	2	No	Yes
SY34373	12-48	Plastic	Digital	2	No	Yes
SY40049	12		Analog		No	No

Hour Meters & Kits Medidores y Kits Horamètre

	Voltage	Lens Type	Display	Terminals	Polarity Protected	UL
SY43158	12-48	Plastic	Digital	3		
SY44478	24-144	Plastic	Digital	2	No	No
SY45018 	12-48	Glass	Digital	3	No	No
SY47771	10-80	Glass	Analog	2	Yes	Yes
SY58558|		Glass	Analog	3	No	No
SY77630	12	Plastic	Analog	2	No	No
SY88512	12	Glass	Analog	15 pin plug	No	No

	Voltage	Lens Type	Display	Terminals	Polarity Protected	UL
SY88513	12-48	Glass	Digital	3	No	No
SY88514	24-48	Glass	Digital	3		
SY88515	10-60	Plastic	Digital	4		
SY88516	12-48	Glass	Digital	2		Yes
SY88517	12-48	Glass	Digital	3	No	Yes
SY1222456	10-80	Plastic	Analog	2		
SY1244444	12-24	Plastic	Analog	2	Yes	Yes

Hour Meters & Kits **Medidores y Kits** Horamètre

Resettable hour meters	▼	Voltage	Lens Type	Display	PP	UL	**Mount** ▼
• Six digit LCD display and an hour glass icon to show running indicator • Temperature range of -30°C to 71°C • Meets SAE J1378 vibration standards • Termination is ¼ male blade terminals • 100% sealed • Can use for both AC & DC applications • Made in the USA 	SY1222224	5-60	Plastic	Digital	Yes		2" Round panel mount
• Six digit LCD display and an hour glass icon to show running indicator • Temperature range of -30°C to 71°C • Meets SAE J1378 vibration standards • Termination is ¼ male blade terminals • 100% sealed • Can use for both AC & DC applications • Made in the USA 	SY1222225	5-60	Plastic	Digital	Yes		3-hole flange mount for 2" hole

G-Force Impact Monitors **Monitores de Impacto G-Force** Moniteurs d'Impact G-Force

- GF1 - 2 - 3 units are 12-80V

G-Force 1 ▼	Description	Needs	New Customer
SYGF1	With integrated alarm	1 G-Force 1 unit per fleet vehicle and one SYDCK000 per supervisor.	SYPCS008 key set is required to set proper impact thresholds.
SYGF1W	Waterproof with integrated alarm	1 G-Force 1 unit per fleet vehicle and one SYDCK000 per supervisor.	SYPCS008 key set is required to set proper impact thresholds.

G-Force 2 ▼	Description	Needs	New Customer
SYGF2	With integrated alarm	For existing installations (prior to 2007): order one (1) GF2KIT per location when adding a new style G-Force Impact Monitor.	1 G-Force 2 unit per fleet vehicle, 1 SYDCK000 (disarm key) per supervisor, 1 SYOCP002 (operator key) per operator and 1 SYMVG00 (key interface kit) per location additional program keys (PCGXXX) may be required.
SYGF2W	Waterproof with integrated alarm	For existing installations (prior to 2007): order one (1) GF2KIT per location when adding a new style G-Force Impact Monitor.	1 G-Force 2 unit per fleet vehicle, 1 SYDCK000 (disarm key) per supervisor, 1 SYOCP002 (operator key) per operator and 1 SYMVG00 (key interface kit) per location additional program keys (PCGXXX) may be required.

G-Force 3 ▼	Description	Needs	New Customer
SYGF3	With integrated alarm	For existing installations (prior to 2007): order one (1) GF3KIT per location when adding a new style G-ForceE Impact Monitor.	1 G-Force 3 unit per fleet vehicle, 1 SYDCK000 (disarm key) per supervisor, 1 SYOCP002 (operator key) per operator and 1 SYMK100 (key interface kit) per location additional program keys (PCGXXX) may be required. A quantity of data keys (SYDDK03) are required depending on fleet size and number of shifts.
SYGF3W	Waterproof with integrated alarm	For existing installations (prior to 2007): order one (1) GF3KIT per location when adding a new style G-Force Impact Monitor.	1 G-Force 3 unit per fleet vehicle, 1 SYDCK000 (disarm key) per supervisor, 1 SYOCP002 (operator key) per operator and 1 SYMK100 (key interface kit) per location additional program keys (PCGXXX) may be required. A quantity of data keys (SYDDK03) are required depending on fleet size and number of shifts.

Keys

▼	Description	Contained in SYPCS008 Program Set
SYCFG004	Configuration key (yellow key)	
SYDCK000	G-Force - disarming key (red key)	
SYDDK03	Data key (blue key)	
SYOCP002	Operator key (green key)	
SYPCG003	0.3G programming key	Yes
SYPCG004	0.4G programming key	Yes
SYPCG005	0.5G programming key	Yes
SYPCG006	0.6G programming key	Yes
SYPCG007	0.7G programming key	Yes
SYPCG008	0.8G programming key	Yes

▼	Description	Contained in SYPCS008 Program Set
SYPCG009	0.9G programming key	Yes
SYPCG010	1.0G programming key	Yes
SYPCG012	1.2G programming key	
SYPCG013	1.3G programming key	
SYPCG015	1.5G programming key	
SYPCG018	1.8G programming key	
SYPCG020	2.0G programming key	
SYPCG030	3.0G programming key	
SYPCS008	G-Force - 8 program key set	

Collision Sentry®

Resettable Hour Meter
- Self-powered
- Highly visible LED lights
- Portable, compact and lightweight
- Low battery indicator
- Includes magnet mounts for easy installation
- Tether included with each unit for added security

▼	Description
SYCLN-A-160	Collision Sentry®helps reduce or eliminate "blind corner" collisions by providing a visual warning that alerts forklift drivers and pedestrians to approaching traffic.

Electronic Code Switches **Interruptores Electrónicos de Contraseña** Interrupteurs de Codage Électronique

SY31214
- 12-120VDC
- UL, CE and RoHS compliant
- Waterproof, IP65
- 99 Programmable user codes
- Maintenance cycle - 250 on hours, unit will beep intermittently until reset
- Last user ID function - supervisor can see who last used the unit
- 1 year warranty

SYPSL2000
- 12-90VDC
- 99 codes
- 0.5lb
- UL & cUL approved

SYPSL1000
- 12-90VDC
- 1 code
- 0.5lb
- UL & cUL approved

Overspeed Warning System **Advertencia de Pasar Velocidad Máxima** Avertisseur de Survitesse

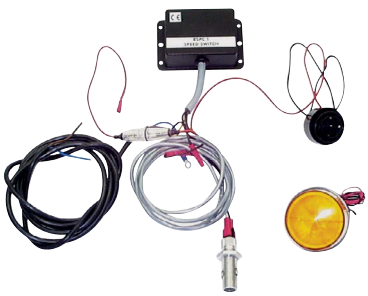

▼	Voltage	Description
SY32806	12	• System activates a warning light and buzzer when preset speed is reached • Potentiometer easily adjusts speed
SY32807	24	

SkidWeigh Systems **Sistemas de Pesar Paletas** Systèmes de Pesage pour Palettes

▼	Description	Features
SYED2	Standard SkidWeigh kit without overload	• Forklift check weighing scale • On-board lift truck scale engineered with the operator in mind the system is easy to use • Accurate to +/-1% of capacity and capable of withstanding the most demanding and challenging environments. • Measurement range up to 50,000lb

Options Available

▼	Description
SYED2-AT	Accumulative load weight option
SYED2-SM	Audio or visual overload warning - specify at time of order
SYED2-2X	Two independent weighing channels, for quick disconnect attachments
SYED2-PRINT	Includes printer bracket and RS-232 cable (printer sold separate)
SYED2-SLL	Load weight displayed in % of capacity
SYED2-EP	Designed specifically for use with Class III, electric pallet trucks

▼	Description	Features
SYED3	Forklift scale with advanced data options	• Utilizing the same accuracy and durability of the SYED2 design, the SYED3 provides the ability to create information and reports pertaining to load, vehicle, application and operator data. • Comes complete with advanced USB data export.

Options Available

▼	Description
SYED3-AT	Accumulative load weight option
SYED3-SM	Audio or visual overload warning - specify at time of order
SYED3-EPT	Designed specifically for use with Class III, electric pallet trucks

▼	Description	Features
SYED4	Forklift Scale with advanced wireless data options	• The SYED4 mobile weighing and vehicle manager is the most comprehensive on-board productivity system available for material handling today. • Designed to integrate seamlessly into any operation, the SYED4 provides the same +/-1% accuracy of rated capacity • Two way data connectivity and export, featuring bluetooth options, RF wireless communication, or both.

Options Available

▼	Description
SYED4-AT	Accumulative load weight option
SYED4-SM	Audio or visual overload warning - specify at time of order
SYED4-EPT	Designed specifically for use with Class III, electric pallet trucks

Skidweigh Options

▼	Description
SYED2-TRANSDUCER	Pressure transducer, wiring harness and adapter

▼	Description
SYMPT2	On board thermal printer for SYED2-Print with RS-232 option

▼	Description
SYMPT3	On board thermal printer for SYED2-Print with Bluetooth option

5" LCD Color Camera Kit ▼
SYCS5LCD33-KIT1

Specifications

- Monitor:
  - Screen: 5" LCD color, anti-glare
  - Camera inputs: 3
  - Camera triggers: 3
  - Input power: 12-24VDC
  - Power consumption: 700mA
  - System: NTSC/PAL (auto-switching)
  - Operating temperature: -4°F to +158°F
  - Mechanical shock: 100G
  - Mechanical vibration: 5G
  - Size (Width x Height x Depth): 5.8" x 4.3" x 1.0"
  - Effective display area (Width x Height): 4.05" x 3.03" (5" diagonal)
  - Warranty: 1 year
- Monitor features:
  - Auto day/night dimmer
  - Screen menu available in 11 languages
  - Backlit control buttons
  - Electronic distance markers
  - Color & tint controls
  - Mirror/normal image switching
  - Built-in speaker
  - Sun shield
  - Universal mounting bracket
- Camera:
  - Lens: Color wide angle (110°)
  - Light: 18 infra red LEDs
  - Resolution: 270,000 pixels
  - Operating temperature: -4°F to +158°F
  - Mechanical shock: 100G
  - Mechanical vibration: 10G
  - Size (Width x Height x Depth): 2.8" x 1.8" x 2.2"
  - Warranty: 1 year
- Camera features:
  - Ultra low light performance
  - Integral microphone
  - Automatic electronic iris
  - Sun shield
  - Durable, waterproof construction
  - Waterproof cable connection
  - Cable length: 33'

7" LCD Color Camera Kit ▼
SYCS7LCD33-KIT1

Specifications

- Monitor:
  - Screen: 7" LCD color, anti-glare
  - Camera inputs: 3
  - Camera triggers: 3
  - Input power: 12-24VDC
  - Power consumption: 875mA
  - System: NTSC/PAL (auto-switching)
  - Operating temperature: -4°F to +158°F
  - Mechanical shock: 100G
  - Mechanical vibration: 5G
  - Size (Width x Height x Depth): 7.1" x 4.8" x 1.0"
  - Effective display area (Width x Height): 6.1" x 3.5" (7" diagonal)
  - Warranty: 1 year
- Monitor features:
  - Auto day/night dimmer
  - Screen menu available in 11 languages
  - Backlit control buttons
  - Electronic distance markers
  - Color & tint controls
  - Mirror/normal image switching
  - Built-in speaker
  - Sun shield
  - Universal mounting bracket
- Camera:
  - Lens: Color wide angle (110°)
  - Light: 18 infra red LEDs
  - Resolution: 270,000 pixels
  - Operating temperature: -4°F to +158°F
  - Mechanical shock: 100G
  - Mechanical vibration: 10G
  - Size (Width x Height x Depth): 2.8" x 1.8" x 2.2"
  - Warranty: 1 year
- Camera features:
  - Ultra low light performance
  - Integral microphone
  - Automatic electronic iris
  - Sun shield
  - Durable, waterproof construction
  - Waterproof cable connection
  - Cable length: 33'

Fire Extinguishers Extintores Extincteurs

		Agent Weight ▼	Material	UL Rating	Dimension (Diameter x Height)	Description
	SY210RFC	2.00lb	Aluminum	5-B:C	3¼" x 11½" 83mm x 278mm	• Retention strap bracket included • Disposable
	SY210RFC-MB	2.50lb	Aluminum	1-A:10-B:C	3¼" x 13¾" 83mm x 349mm	• Retention strap bracket included • Disposable
	SY417T	2.50lb	Aluminum	1-A:10-B:C	3¼" x 13¾" 83mm x 349mm	• Retention strap bracket included • Disposable
	SY90279	2.50lb	Aluminum	1-A:10-B:C	3¼" x 14$^{6}/_{23}$" 83mm X 362mm	• Plastic bracket with metal strap included • Rechargeable
	SY1237147	2.50lb	Metal	1-A:10-B:C	3" x 15½" 76mm x 394mm	• Retention strap bracket included • Rechargeable
	SY250RFC	2.75lb	Aluminum	10-B:C	3¼" x 13¾" 83mm x 349mm	• Plastic bracket with metal strap included • Disposable
	SY410RFC	5.50lb	Aluminum	3-A:40-B:C	4½" x 16$^{3}/_{10}$" 114mm x 414mm	• Wall hanger included • Rechargeable
	SY510RFC	5.50lb	Aluminum	3-A:40-B:C	4½" x 16$^{3}/_{10}$" 114mm x 414mm	• Wall hanger included • Rechargeable

Fire Extinguisher Brackets

	SY817	Metal
	SYMB-275	Non corrosive stainless steel
	SYMB-5	Metal

Level Sensors Sensores del Nivel Capteurs de Niveau

SY32810

- NC - contact
- Trip angle 4.5°
- Time delay 2.5 seconds
- Temperature range: -31°F - 185°F
- Voltage: 12-48

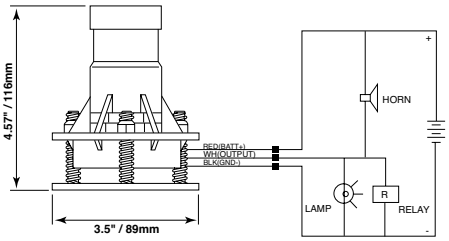

Sensor - Digital Switch Angle		Tilt ▼	Delay
	SY77399	71°	0 seconds

Sensor - Dual Axis Tilt		Tilt ▼	Delay
	SY77404	0.5° / 1.5°	2 seconds
	SY77427	1.5° / 3.5°	2 seconds
	SY77418	1.5° / 3°	1.5 seconds
	SY77410	1.5° / 3°	2 seconds
	SY77419	1.5° / 3°	2 seconds
	SY95802	1.5° / 4°	1.5 seconds
	SY77439	2° / 3°	1.5 seconds
	SY77412	2° / 4°	2 seconds
	SY77415	2° / 4°	2 seconds
	SY77411	2° / 4°	2 seconds
	SY77443	2° / 4°	2 seconds
	SY77405	2.5° / 4.5°	2 seconds
	SY77406	2.5° / 4.5°	2 seconds
	SY77416	2.7° / 5.7°	2 seconds

Sensor - Ratiometer Switch Angle		Tilt ▼	Delay
	SY77398	70°	0 seconds

Sensor - Tilt		Tilt ▼	Delay
	SY77408	3°	1 seconds
	SY77407	5°	2 seconds
	SY1241061	5°	1.5 seconds

Sensor - Omni Directional Tilt		Tilt ▼	Delay
	SY77429	2°	2 seconds
	SY77434	2°	2 seconds
	SY77424	2°	2 seconds
	SY77433	2°	1 seconds
	SY77441	2°	2 seconds
	SY1241060	2°	1 seconds
	SY77435	2.5°	2 seconds
	SY77431	3.5°	2 seconds
	SY77403	3.5°	2 seconds
	SY77421	3°	2 seconds
	SY77413	3°	1 seconds
	SY77414	3°	1 seconds
	SY77402	3°	2 seconds
	SY77432	4°	2 seconds
	SY77423	4°	2 seconds
	SY77394	4.2°	0 seconds
	SY77436	4.5°	1.5 seconds
	SY77417	4.5°	1 seconds
	SY77440	4.5°	0 seconds
	SY77395	4.5°	1.5 seconds
	SY77425	4.5°	1 seconds
	SY77437	4.5°	1.5 seconds
	SY77426	4.5°	1 seconds
	SY77430	5°	2 seconds
	SY77428	5°	2 seconds
	SY77422	5°	2 seconds
	SY77420	5°	2 seconds
	SY77442	5°	2 seconds

Mirrors Espejos Miroirs

Square & Rectangular Style Mirrors

	Length ▼	Width	Mirror Lens Material
SY1232495	5.50" 140mm	7.50" 191mm	Glass
SY1232109	6.00" 152mm	6.50" 165mm	Acrylic
SY34384	6.25" 159mm	4.00" 102mm	Glass
SY1232485	6.50" 165mm	10.00" 254mm	Glass
SY1232498	6.50" 165mm	10.00" 254mm	Glass
SY1210935	6.81" 173mm	6.26" 159mm	Acrylic
SY1232100	7.00" 178mm	3.70" 95mm	Glass
SY76646	7.32" 186mm	5.32" 135mm	Acrylic

	Length ▼	Width	Mirror Lens Material
SY71159	7.40" 188mm	4.00" 102mm	Glass
SY71161	7.40" 188mm	5.00" 127mm	Glass
SY1232491	7.50" 191mm	10.50" 267mm	Glass
SY34386	8.00" 203mm	4.60" 117mm	Glass
SY71158	8.13" 203mm	4.60" 117mm	Glass
SYLT48	8.15" 207mm	4.20" 107mm	Acrylic
SYLT48P	8.15" 207mm	4.20" 107mm	Acrylic
SY77826	8.50" 216mm	4.50" 114mm	Glass

Mirrors Espejos Miroirs

Square & Rectangular Style Mirrors

	Length ▼	Width	Mirror Lens Material
SY71162	8.50" 216mm	6.00" 152mm	Glass
SY102657	8.85" 225mm	4.90" 125mm	Glass
SY1232106	9.25" 235mm	7.08" 180mm	Glass
			
SY34387	9.40" 239mm	5.50" 140mm	Glass
SYLT69	9.40" 239mm	6.40" 163mm	Acrylic
SYLT69G	9.40" 239mm	6.40" 163mm	Glass
SY1232481	9.49" 241mm	6.30" 160mm	Acrylic
SY1232480	9.61" 244mm	6.22" 158mm	Glass

	Length ▼	Width	Mirror Lens Material
SY1232492	9.65" 245mm	5.71" 145mm	Glass
SY1232105	9.90" 251mm	6.70" 170mm	Acrylic
SYLT48G	10.00" 254mm	5.00" 127mm	Glass
SY1232108	10.15" 258mm	7.87" 200mm	Acrylic
SY1232482	10.39" 264mm	5.28" 134mm	Acrylic
SY1231315	11.50" 292mm	4.00" 102mm	Acrylic
SY103656	11.61" 295mm	6.69" 170mm	Glass
SY1232494	12.28" 312mm	9.13" 232mm	Glass

Mirrors Espejos Miroirs

Square & Rectangular Style Mirrors

	Length ▼	Width	Mirror Lens Material
SY1232489	12.60" 320mm	7.32" 186mm	Acrylic
SY1232104	12.80" 325mm	7.70" 196mm	Glass
SY1232483	13.39" 340mm	10.24" 260mm	Glass

	Length ▼	Width	Mirror Lens Material
SY1232107	14.17" 360mm	9.45" 240mm	Glass
SY1232486	14.84" 377mm	7.40" 188mm	Acrylic

Panoramic Mirrors

	Length ▼	Width	Angle View	Mirror Lens Material
SY1909159	5.50" 140mm	10.80" 274mm	180°	Acrylic
SY3762118	5.50" 140mm	10.80" 274mm	180°	Acrylic

	Length ▼	Width	Angle View	Mirror Lens Material
SY1232490	8.00" 203mm	2.25" 57mm	None	Glass

Round Style Mirrors

	O.D. ▼	Mirror Lens Material
SY1191G	4.40" 112mm	Glass
SY1191	4.40" 112mm	Acrylic

	O.D. ▼	Mirror Lens Material
SYLT50	5.00" 127mm	Acrylic
SYLT50G	5.00" 127mm	Glass

Mirrors Espejos Miroirs

Round Style Mirrors

	O.D. ▼	Mirror Lens Material
SY1193	6.38" 162mm	Acrylic
SY1193G	6.38" 162mm	Glass
SY1234337	8.00" 210mm	Glass
SYLT80G	8.00" 210mm	Glass

	O.D. ▼	Mirror Lens Material
SYLT80	8.00" 203mm	Acrylic
SYLT80DP	8.00" 203mm	Acrylic
SY1236288	8.50 216mm"	Glass
SYLT110	11.00" 279mm	Acrylic

Circular Convex Mirrors

	O.D. ▼	Type of Backing	Material
SY71510	12.00" 305mm	Hardboard	Acrylic
SY71580	12.00" 305mm	Galvanized	Acrylic
SY71511	18.00" 457mm	Hardboard	Acrylic
SY88137	18.00" 457mm	Galvanized	Acrylic
SY71512	26.00" 660mm	Hardboard	Acrylic
SY88138	26.00" 660mm	Galvanized	Acrylic

	O.D. ▼	Type of Backing	Material
SY71513	30.00" 762mm	Hardboard	Acrylic
SY88139	30.00" 762mm	Galvanized	Acrylic
SY88140	36.00" 914mm	Galvanized	Acrylic

Mirrors Espejos Miroirs

Acrylic Full Dome Mirrors



	O.D. ▼	Type of Backing	Angle View
SY88119	18.00" 457mm	Hardboard	360º
SY88120	26.00" 660mm	Hardboard	360º
SY88121	32.00" 813mm	Hardboard	360º
SY71597	36.00" 914mm	Hardboard	360º
SY88122	48.00" 1219mm	Hardboard	360º

Acrylic Half Dome Mirrors

	O.D. ▼	Type of Backing	Angle View
SY88174	9.00" 229mm	Plastic	180º
SY88175	9.00" 229mm	Plastic	180º





Acrylic Quarter Dome Mirrors



	O.D. ▼	Type of Backing	Angle View
SY88127	18.00" 457mm	Hardboard	90º
SY88128	26.00" 660mm	Hardboard	90º
SY88129	32.00" 813mm	Hardboard	90º

Shock Absorber Amortiguador Amortisseur

SYWUBUMP

WuBump™ is a universal shock absorber that can be mounted on the back of any forklift (up to 5 tons).

WuBump™ protects your:

- Driver: prevents neck and back injuries
- Warehouse: absorbs the energy from a collision with the infrastructure
- Equipment: no damage to the machine or the load

Fans Ventiladores Ventilateurs

Fan	Voltage ▼	Size	CFM	Blades	Motor
SY9012	12	6.50" 165mm	250	4	2 speed
SY9024	24	6.50" 165mm	250	4	2 speed
SY9036	36	6.50" 165mm	250	4	2 speed
SY9048	48	6.50" 165mm	250	4	2 speed

Service Parts

SY53051	Switch
SY53018	Guard
SY53031	Blade

Fan	Voltage ▼	Size	CFM	Blades	Motor
SY9912	12	6.50" 165mm	250	4	Variable speed rheostat
SY9924	24	6.50" 165mm	250	4	Variable speed rheostat
SY9936	36	6.50" 165mm	250	4	Variable speed rheostat

Service Parts

SY53025	Switch
SY53030	Fan blade assembly
SY53017	Fan guard assembly

Fan	Voltage ▼	Size	CFM	Blades	Motor
SY9912-E	12	6.50" 165mm	250	4	Variable speed rheostat
SY9924-E	24	6.50" 165mm	250	4	Variable speed rheostat
SY9936-E	36	6.50" 165mm	250	4	Variable speed rheostat
SY9048-E	48	6.50" 165mm	250	4	Variable speed rheostat

Fan	Voltage ▼	Size	CFM	Blades
SY3200-24	24	6.50" 165mm	280	4

Models 455H



▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Motor Speeds	Core Material	Fan Material	Fittings	Mounting
SY455H-12	8¼" x 13¾" x 4¾" 210mm x 349mm x 121mm	2.40A@12V	13,000 btu/hr	130 cfm	3	V. Cell	Aluminum	Bead	Rear mounting studs
SY455H-24	8¼" x 13¾" x 4¾" 210mm x 349mm x 121mm	1.20A@24V	13,000 btu/hr	130 cfm	3	V. Cell	Aluminum	Bead	Rear mounting studs

Models 512H

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Motor Speeds	Core Material	Fan Material	Fittings	Mounting
SY512H-12	7" x 8" x 7⅛" 178mm x 203mm x 181mm	1.50A@12V	15,000 btu/hr	150 cfm	3	V. Cell	Aluminum	Bead	Top & bottom ½-20 mounting nuts
SY512H-24	7" x 8" x 7⅛" 178mm x 203mm x 181mm	0.75A@24V	15,000 btu/hr	150 cfm	3	V. Cell	Aluminum	Bead	Top & bottom ½-20 mounting nuts

Models 5000

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Motor Speeds	Core Material	Fan Material	Fittings	Mounting
SY5000-12	6⅞" x 6⅞" x 7¼" 175mm x 175mm x 184mm	1.50A@12V	12,500 btu/hr	130cfm	35 cfm	Tube and fin	Aluminum	Bead	Rear mounting studs
SY5000-24	6⅞" x 6⅞" x 7¼" 175mm x 175mm x 184mm	0.75A@24V	12,500 btu/hr	130cfm	35 cfm	Tube and fin	Aluminum	Bead	Rear mounting studs

Models 6000

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Core Material	Fan Material	Fittings
SY6000-12	7⅜" x 7½" x 7⅛" 187mm x 191mm x 181mm	1.50A@12V	15,000 btu/hr	140 cfm	Tube and fin	Aluminum	Bead
SY6000-24	7⅜" x 7½" x 7⅛" 187mm x 191mm x 181mm	0.75A@24V	15,000 btu/hr	140 cfm	Tube and fin	Aluminum	Bead

Models 6500

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Motor Speeds	Core Material	Fan Material	Fittings
SY6500-12	10" x 11⅝" x 5" 254mm x 295mm x 127mm	5.00A@12V	20,000 btu/hr	170 cfm	3	Tube and fin	Aluminum	Bead
SY6500-24	10" x 11⅝" x 5" 254mm x 295mm x 127mm	2.50A@24V	20,000 btu/hr	170 cfm	3	Tube and fin	Aluminum	Bead

Models 8000

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Air Flow Defrosting	Motor Speeds	Core Material	Fan Material	Fittings	Mounting
SY8000-12	8⅛" x 8½" x 8⅛" 206mm x 216mm x 206mm	5.00A@12V	20,000 btu/hr	250 cfm	60 cfm	3	Tube and fin	Aluminum	Bead	Rear mounting studs
SY8000-24	8⅛" x 8½" x 8⅛" 206mm x 216mm x 206mm	2.50A@24V	20,000 btu/hr	250 cfm	60 cfm	3	Tube and fin	Aluminum	Bead	Rear mounting studs

Heaters Calentadores Réchauffeurs

Models 9000

▼	Dimensions (Height x Length x Depth)	Power Requirements	Heating	Air Flow Heating	Motor Speeds	Core Material	Fan Material	Fittings	Mounting
SY9000-12	6¾" x 16½" x 8⅝" 171mm x 419mm x 219mm	8.50A@12V	33,000 btu/hr	340 cfm	2	Tube and fin	Aluminum	½" PT	Top, side and bottom mounting weld nuts
SY9000-24	6¾" x 16½" x 8⅝" 171mm x 419mm x 219mm	4.25A@24V	33,000 btu/hr	340 cfm	2	Tube and fin	Aluminum	½" PT	Top, side and bottom mounting weld nuts
SY9000-36	6¾" x 16½" x 8⅝" 171mm x 419mm x 219mm	2.75A@36V	33,000 btu/hr	340 cfm	2	Tube and fin	Aluminum	½" PT	Top, side and bottom mounting weld nuts

Heater Accessories Accesorios del Calentador Accessoires de réchauffeur

Heater Installation Kit

▼	Features	Fit
SY64006	This plumbing fittings kit is used to install all heater models listed below. The kit contains one 150" heater hose, a water shut off valve, pipe connector, reducer bushing, and four hose clamps.	SY455H-12, SY455H-24, SY512H-12, SY512H-24, SY5000-12, SY5000-24, SY6500-12, SY6500-24, SY6000-12, SY6000-24, SY8000-12, SY8000-24

Switch kit

▼	Features	Fit
SY5670004	12V or 24V with a 3' wire harness	SY455H-12, SY455H-24, SY512H-12, SY512H-24, SY8000-12, SY8000-24

Cab Accessories Accesorios para la Cabina Accessoires de Cabine

Sta-Dry Universal All-Weather Cab Enclosure

- Fits: 2,000-6,000lb forklifts (SYSTA-DRY-S)
  6,000-12,000lb forklifts (SYSTA-DRY-L)
  12,000-20,000lb forklifts (SYSTA-DRY-XL)
- Heavy duty webbing at all bottom attach points
- Easy to install
- 16gauge high quality clear vinyl top and sides
- Zippered doors on each side
- Keeps driver dry and out of the wind
- Fits any brand fork truck
- All zippered closures

	Size ▼
SYSTA-DRY-S	35" x 46" 889mm x 1168mm
SYSTA-DRY-L	45" x 43" 1143mm x 1092mm
SYSTA-DRY-XL	48" x 60" 1219mm x 1524mm

Cab Accessories Accesorios para la Cabina Accessoires de Cabine

Windshield

- Fits all fork trucks and most heavy equipment
- Easy to install
- Freeze point flexibility
- UV yellow inhibitor
- 16gauge high quality clear vinyl
- Heavy duty webbing
- Marine grade stitching

	Size ▼
SYFORKSHIELD	48" x 42" 1219mm x 1067mm

Canopy

- No more squinting while having an overhead load
- Custom tinted anti sun-glare material
- More coverage with the see through visor
- Keep cool from overhead sun
- Fits all lifts
- Protection from sun, debris and rain
- Attaches to all lifts in seconds

	Size ▼
SYSOLARCAP	48" x 42" 1219mm x 1067mm

Storage Cover ▼	Size
SY71385	100" x 45" x 80" 2540mm x 1143mm x 2032mm

Mag-Kaddy® ▼	Size	Magnet Force
SY1196	3" x 5" x 3" 76mm x 127mm x 76mm	60lb

Magnum Mag-Kaddy® ▼	Size	Magnet Force
SY1197	7" x 9" x 5" 178mm x 229mm x 127mm	60lb

Mag-Klip® Clip Board ▼	Size	Magnet Force
SY1195	9" x 12" usable 229mm x 305mm 9" x 15" overall 229mm x 381mm	60lb

Scissor Lift Tool Bin ▼	Size
SYBIN-AWP	21" x 21" x 9"

Floor Mats Alfombrillas Tapetes

	Description ▼
SY36307	Floor tread
SY71288	Foot pad
SY71287	Heel guard tread
SY94502	Left hand mat
SY101041	Mat
SY1220056	Mat
SY1220250	Mat
SY1221134	Mat
SY1222809	Mat
SY1222810	Mat

	Description ▼
SY1244442	Mat
SY1244443	Mat
SY71272	Mat
SY71274	Mat
SY71278	Mat
SY71279	Mat
SY71281	Mat
SY71296	Mat
SY71297	Mat
SY71299	Mat

Floor Mats Alfombrillas Tapetes

	Description ▼
SY71302	Mat
SY71303	Mat
SY71304	Mat
SY71306	Mat
SY71307	Mat
SY72291	Mat
SY81781	Mat
SY81837	Mat
SY99-03536	Mat
SY99-03537	Mat

	Description ▼
SY99-03538	Mat
SY24548 	Mat
SY1236158	Pad
SY24533 	Pad
SY36306	Pad
SY36576	Pad
SY36579	Pad
SY36833	Pad
SY36834	Pad
SY36903	Pad

Floor Mats Alfombrillas Tapetes

	Description ▼
SY36978	Pad
SY71280	Pad
SY71289	Pad
SY71290	Pad
SY71291	Pad
SY71292	Pad
SY71293	Pad
SY71294	Pad
SY71286	Pad
SY71308	Pedal mat

	Description ▼
SY99-00474	Platform mat
SY94521	Right hand mat
SY36928	Rubber mat
SY71277	Rubber mat
SY83244	Rubber mat
SY34392	Rubber mat
SY36863	Safety mat
SY71273	Safety mat
SY77296	Safety mat
SY36864	Safety right hand mat

Floor Mats Alfombrillas Tapetes

	Description ▼
SY71300	Safety tread
SY71301	Safety tread
SY52545 	Step mat

	Description ▼
SY1222808	Sub assembly floor mat
SY43882	Tread

Safety Glasses Gafas de Seguridad Lunettes de Sécurité

Uvex Protégé

- Offers highest available impact protection. Meets ANSI Z87.1-2003 and military V0 ballistic impact test
- Certified to the requirements of CSA Z94.3
- Lifetime frame guarantee
- Proprietary floating lens design offers increased flexibility in fit
- Secure wrap-around brow expands to fit a wide range of users
- Ultra lightweight design. At only 25g, it weighs less than one ounce
- Soft temple tip pads provide a secure, comfortable fit
- Comfortable nosepiece with soft, flexible nasal fingers conforms to a variety of facial profiles and minimize slippage

▼	Frame	Lens	Lens Coating	ANSI Z87
SYS4200XC	Metallic black	Clear	Anti-scratch	Yes
SYS4200XXC	Metallic black	Clear	Anti-fog	Yes
SYS4201XC	Metallic black	Gray	Anti-fog	Yes
SYS4201XXC	Metallic black	Gray	Anti-fog	Yes
SYS4221XC	Metallic black	SCT-Blue	Anti-scratch	Yes
SYS4221XXC	Metallic black	SCT-Blue	Anti-fog	Yes
SYS4222XC	Metallic black	Amber	Anti-scratch	Yes
SYS4222XXC	Metallic black	Amber	Anti-fog	Yes

Uvex Solar Pro

- Designed for optimum peripheral vision and comfort where protection from the sun is crucial to performance
- Sport-inspired wrap-around design
- Soft, padded temples & nose piece delivers a comfortable, non-slip fit
- Ratcheting temples make it easy to adjust the lens angle for a close fit
- Lens adjusts to lighting conditions to minimize sunlight and glare
- Meets ANSI Z87.1-2003 (high impact) standard
- 100% dielectric
- Lifetime frame guarantee

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1241072	Gray & red	Gray photochromatic	Anti-fog/anti-scratch	Yes

Safety Glasses Gafas de Seguridad Lunettes de Sécurité

Genesis X2

- Wrap-around 9-base uni-lens sytle for uncompromised peripheral vision and superior coverage
- Offers highest available impact protection. Meets ANSI Z87.1-2003 and military V0 ballistic impact test
- Lifetime frame guarantee
- Soft elastomer browguard diffuses and deflects impact while providing comfort at all contact points
- Soft flexible fingers on the nose piece adjust and conform to almost any nasal profile to reduce slippage
- Ratcheting temples allow customized lens inclination

▼	Frame	Lens	Lens Coating	ANSI Z87
SYS3500	Silver & navy	Clear	Anti-scratch	Yes
SYS3500X	Silver & navy	Clear	Anti-fog	Yes
SYS3502	Silver & navy	Amber	Anti-scratch	Yes
SYS3503	Silver & navy	Gold Mirror	Anti-scratch	Yes
SYS3512X	Silver & navy	Dark Gray	Anti-fog	Yes
SYS3520	Black & yellow	Clear	Anti-scratch	Yes
SYS3520D	Black & yellow	Clear	Dura-streme	Yes
SYS3520X	Black & yellow	Clear	Anti-fog	Yes
SYS3522	Black & yellow	Amber	Anti-scratch	Yes
SYS3523	Black & yellow	Gold Mirror	Anti-scratch	Yes
SYS3532X	Black & yellow	Dark Gray	Anti-fog	Yes

A900CSA

- Offers highest available impact protection. Meets ANSI Z87.1-2003 and military V0 ballistic impact test
- Certified to the requirements of CSA Z94.3
- Sporty, 8-base wrap-around polycarbonate lens
- Non-slip rubber nose bridge
- Temples with soft, padded inserts provide a comfortable fit

▼	Frame	Lens	Lens Coating	ANSI Z87
SYA900CSA	Black	Clear	Anti-scratch	Yes
SYA901CSA	Black	Clear	Fog-Ban® Anti-fog	Yes
SYA902CSA	Black	TSR gray	Anti-scratch	Yes
SYA903CSA	Black	TSR gray	Fog-Ban® Anti-fog	Yes
SYA904CSA	Black	Silver mirror	Anti-scratch	Yes

A800

- Complies with ANSI Z87+ high impact standard
- Temples feature aggressive sports styling and soft, padded inserts with extra flex built in for more comfort
- Soft nosepiece conforms to various nose bridge shapes for added comfort and a non-slip fit

▼	Frame	Lens	Lens Coating	ANSI Z87
SYA800	Clear	Clear	Anti-scratch	Yes
SYA801	Gray	Gray	Anti-scratch	Yes
SYA802	Amber	Amber	Anti-scratch	Yes
SYA804	Gray	Silver mirror	Anti-scratch	Yes
SYA805	Clear	Clear	Fog-Ban® Anti-fog	Yes
SYA806	Gray	Gray	Fog-Ban® Anti-fog	Yes

Safety Glasses Gafas de Seguridad Lunettes de Sécurité

Body Glove V-Line Plus
- Complies with ANSI Z87.1+ high impact standard
- Lenses have H2 scratch resistant coating
- Patented foam pads at temples and frame enhance fit and provide increased protection below and at side of lenses

▼	Frame	Lens	Lens Coating	ANSI Z87
SY88020	Brown	Brown	H2 scratch-resistant	Yes
SY88021	Black	Gray	H2 scratch-resistant	Yes
SY88023	Camo	Brown	H2 scratch-resistant	Yes
SY88024	Camo	Gray	H2 scratch-resistant	Yes
SY88025	Camo	Clear	H2 scratch-resistant	Yes
SY88026	Silver	Clear	H2 scratch-resistant	Yes
SY88027	Silver	Gray	H2 scratch-resistant	Yes

Body Glove Polarized
- Complies with ANSI Z87.1+ high impact standard
- Polarized lenses absorb glare created by horizontal lightwaves bouncing off water, sand, snow and glass or metal surfaces
- Reduced glare eases eyestrain and muscle fatigue cause by constant squinting
- Strong polycarbonate due lens construction
- H2 scratch resistant coating
- Patented foam pads at temples and fame interior enhance side-shield protection and fit

▼	Frame	Lens	Lens Coating	ANSI Z87
SY88011	Dark brown	Brown	H2 scratch resistant	Yes
SY88012	Black	Gray	H2 scratch resistant	Yes
SY88013	Silver tortise	Gray	H2 scratch resistant	Yes

Body Glove V-Line
- Complies with ANSI Z87.1+ high impact standard
- H2 scratch resistant coating
- Patented foam pads at temples and fame interior enhance side-shield protection and fit

▼	Frame	Lens	Lens Coating	ANSI Z87
SY88005	Black	Smoked	H2 scratch resistant	Yes
SY88006	Black	Smoked mirror	H2 scratch resistant	Yes
SY88007	Brown	Brown	H2 scratch resistant	Yes
SY88008	Clear	Clear	H2 scratch resistant	Yes
SY88009	Clear	Clear mirror	H2 scratch resistant	Yes

Safety Glasses Gafas de Seguridad Lunettes de Sécurité

Fulcrum
- Semi-full frame is lightweight, so you barely know you're wearing them
- Frames are available in two, high-fashion colors: Graphite and Midnight Blue
- Smooth bayonet temples offer a comfortable fit and sleek styling
- Molded nosepiece is shaped to fit a wide array of facial shapes
- 8-base curve offers a close fit with excellent side protection
- Available in a wide array of lens tints to meet the needs of most work environments
- Anti-scratch hardcoat extends the life of the lens for longer wear
- Fog-ban® anti-fog coating, available in clear and gray tints, helps keep lenses clear in humid or extreme environments
- All lenses provide 99.9% UV protection
- Meets ANSI Z87.1 (high impact) standard

▼	Frame	Lens	Lens Coating	ANSI Z87
SYA1010	Blue	Clear	Hardcoat anti-scratch lens	Yes
SYA1011	Blue	Gray	Hardcoat anti-scratch lens	Yes

Diamondbacks
- Meets ANSI Z87.1-2010
- High-impact polycarbonate lenses
- Wrap-around design hugs the face
- Anti-fog coating on lenses
- Scratch-resistant coating
- Non-slip rubber nose piece
- Non-slip temples

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1223068	Red	Clear	Anti-fog and scratch resistant	Yes
SY1223069	Red	Gray	Anti-fog and scratch resistant	Yes
SY1223070	Red	Smoke mirror	Anti-fog and scratch resistant	Yes
SY1223071	Silver	Clear	Anti-fog and scratch resistant	Yes
SY1223072	Silver	Gray	Anti-fog and scratch resistant	Yes
SY1223073	Silver	Smoke mirror	Anti-fog and scratch resistant	Yes
SY1223074	Black	Clear	Anti-fog and scratch resistant	Yes
SY1223075	Black	Gray	Anti-fog and scratch resistant	Yes
SY1223076	Black	Smoke mirror	Anti-fog and scratch resistant	Yes
SY1223077	Black	Yellow	Anti-fog and scratch resistant	Yes
SY1223078	Blue	Clear	Anti-fog and scratch resistant	Yes
SY1223079	Blue	Gray	Anti-fog and scratch resistant	Yes
SY1223080	Blue	Smoke mirror	Anti-fog and scratch resistant	Yes

Lightcrafters
- Ultra-bright built-in LED lights
- Meets ANSI Z87.1-2010
- Available in 4 magnification strengths
- Adjustable LED direction
- Anti-fog coating on lenses
- Scratch-resistant coating
- On/off switch; LR44 batteries included
- Non-slip nose bridge

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1223100	Black with LED lights	Clear with 1.5x magnifier	Anti-fog and scratch resistant	Yes
SY1223101	Black with LED lights	Clear with 2.0x magnifier	Anti-fog and scratch resistant	Yes
SY1223102	Black with LED lights	Clear with 2.5x magnifier	Anti-fog and scratch resistant	Yes
SY1223103	Black with LED lights	Clear with 3.0x magnifier	Anti-fog and scratch resistant	Yes

Safety Glasses Gafas de Seguridad Lunettes de Sécurité

Sidewinder
- Meets ANSI Z87.1-2010
- High-impact polycarbonate lenses
- Adjustable temples to fit a variety of face sizes
- Ratchet inclination
- Anti-fog coating on lenses
- Scratch-resistant coating
- Ribbed non-slip nose cushion

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1223081	Black	Clear	Anti-fog and scratch resistant	Yes
SY1223082	Black	Gray	Anti-fog and scratch resistant	Yes
SY1223083	Black	Yellow	Anti-fog and scratch resistant	Yes
SY1223084	Black	Silver mirror	Anti-fog and scratch resistant	Yes
SY1223085	Black	Gold mirror	Anti-fog and scratch resistant	Yes
SY1223086	Black	Clear with 1.0x magnifier	Anti-fog and scratch resistant	Yes
SY1223087	Black	Clear with 1.5x magnifier	Anti-fog and scratch resistant	Yes
SY1223088	Black	Clear with 2.0x magnifier	Anti-fog and scratch resistant	Yes
SY1223089	Black	Clear with 2.5x magnifier	Anti-fog and scratch resistant	Yes
SY1223090	Black	Clear with 3.0x magnifier	Anti-fog and scratch resistant	Yes

GTR
- Meets ANSI Z87.1-2010
- High-impact polycarbonate lenses
- Wrap-around design hugs the face
- Anti-fog coating on lenses
- Scratch-resistant coating
- Non-slip rubber nose piece
- Non-slip temples

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1223091	Gold	Clear	Anti-fog and scratch resistant	Yes
SY1223092	Gold	Gray	Anti-fog and scratch resistant	Yes
SY1223093	Gold	Iridium	Scratch resistant coating	Yes
SY1223094	Silver	Clear	Anti-fog and scratch resistant	Yes
SY1223095	Silver	Gray	Anti-fog and scratch resistant	Yes
SY1223096	Silver	Blue mirror	Scratch resistant coating	Yes
SY1223097	Charcoal	Clear	Anti-fog and scratch resistant	Yes
SY1223098	Charcoal	Gray	Anti-fog and scratch resistant	Yes
SY1223099	Charcoal	Purple haze	Scratch resistant coating	Yes

LED Inspector
- Ultra-bright built-in LED lights
- Meets ANSI Z87.1-2010
- High-impact polycarbonate lenses
- Scratch-resistant coating
- Anti-fog coating on lenses
- Non-slip nose piece
- On/off switch; LR44 batteries included

▼	Frame	Lens	Lens Coating	ANSI Z87
SY1223104	Black with LED lights	Clear	Anti-fog and scratch resistant	Yes

Safety Goggles Gafas de Seguridad Lunettes de Protection

SY1223056

- Impact resistant polycarbonate lens
- Economical eye protection
- Flexible PVC construction
- Elastic headstrap
- 99.9% UV protection
- ANSI Z87

SY1223057

- Impact resistant polycarbonate lens
- Anti-splash: Special vents prevent liquid from getting in eyes
- Sport-style design with wide elastic headstrap
- Flexible PVC construction
- Anti-fog coating on lens
- 99.9% UV protection
- ANSI Z87

SYS3970D

- Navy body, neoprene headband
- Clear lens, Dura-streme
- Dual (anti-fog / anti-scratch) coating
- ANSI Z87

SYS3971D

- Navy body, neoprene headband
- Standard gray lens, Dura-streme
- Dual (anti-fog / anti-scratch) coating
- ANSI Z87

SYS3972D

- Navy body, neoprene headband
- Amber lens, Dura-streme
- Dual (anti-fog / anti-scratch) coating
- ANSI Z87

Face Shields Viseras Boucliers de Visage

	Description▼
SYPPGR1539	• Full face shield • Ratchet headgear



	Description▼
SY510330-001	• Face shield with headgear

First Aid Kits Kit de Primeros Auxilios Trousse de premiers soins

▼	Description
SY992129	25 Person ANSI/OSHA easy care first aid kit

- Plastic case
- Includes assortment of bandages, antiseptic, gauze, gloves and more
- Perfect for dealing with common workplace injuries like minor cuts, abrasions and sprains
- Assembled in the USA
- Exceeds ANSI/OSHA minimum requirements
- Pockets organized by injury for fast and effective first aid

▼	Description
SY992150	Class A ANSI/OSHA

- Plastic case
- Includes assortment of bandages, antiseptic, gauze, gloves and more
- Perfect for dealing with common workplace injuries like minor cuts, abrasions and sprains
- Assembled in the USA
- Exceeds ANSI/OSHA minimum requirements
- Pockets organized by injury for fast and effective first aid

Major Injury	SY992150	SY992129
Absorbent compress 5" x 9"	0	1
Adhesive tape ½ x 5 yards	1	1
Medical exam gloves (pair)	2	4
Roller gauze 2" x 4 yards	1	2
Roller gauze 3'x 4 yards	0	1
Sterile eye pad	2	1
Sterile pad 2" x 2"	2	0
Sterile pad 3" x 3"	4	4
Sterile pad 4" x 4"	0	4
Trauma pad 5" x 9"	2	0
Triangular bandage 42" x 42" x 59"	1	1
Major Cuts & Scrapes		
Adhesive bandage 1" x 3"	16	30
Butterfly wound closure	1	2
Elbow knee bandage	1	2
Fingertip bandage	2	3
Instruments & Instructions		
Cold pack	1	1
CPR breathing barrier	1	0
First aid guide	1	1
Scissors	1	1
Tweezers	1	1
Medications & Antiseptics		
Afterburn® gel 2 oz tube	1	0
Alcohol prep pad	0	10
Antibiotic treatment application	10	6
Antiseptic treatment application	10	20
Burn dressing (gel soaked) 4"x 4"	1	0
Burn treatment application	10	6
Eye wash 20 ml	0	1
Eye/skin wash ½ fl oz	2	0
Hand sanitizer application 0.9g	6	0
Insect bite relief pad	0	3

Ear Protection Protección Auditiva Protection Auditive

	Description▼
SY9992	• Single-use earplugs • Resists tendency to back-out of ear canal • Bell shape, polyurethane foam enhances comfort, especially for long-term wear • Smooth, soil-resistant closed cell-foam skin prevents dirt build-up • Bulk refills for light source 400 and light source 500 earplug dispensers

	Size▼	Description
SY1223147	Medium	• Made from hypoallergenic, medical-grade polymer • Protects against loud harmful noises • Allows normal conversation to be heard
SY1223148	Large	

SY9993	• Banded earplug, semi-aural • Designed for people who are exposed to intermittent noise

Fall Protection Kits **Kits de Protección de la Caída** Kits de Protection de Chute

Full Body Harness

▼	Size
SY6470	S
SY6471	M/L
SY6472	XXL
SY6474	S/M
SY6475	L/XL
SY6476	XXL
SY6477	S/M
SY6480	S/M
SY6481	L/XL
SY6482	XXL
SY71346	XXXL

- Fully adjustable designs
- One "universal" size fits most

Self-Retracting Lifeline

	Length ▼	Description
SY6462	30'	• Variety of working lengths • No annual factory recertification required • Snap hook with swivel carabiner included • Narrow payout port
SY6463	50'	

SY6496	9'	• With carabiner and swivel HD

Self-Retracting Lifeline

	Length ▼	Description
SY71529	6'	• D-ring connector

SY71530	6'	• Locking rebar hooks

SY71531	6'	• Locking swivel rebar hooks

Self-Retracting Lifeline

	Length ▼	Description
SY6490	9'	• With carabiner and swivel

SY6495	9'	• With twist lock carabiner

Self-Retracting Lifeline

	Length ▼	Description
SY71532	6'	• Aluminum locking snap hooks

SY71533	6'	• Aluminum locking rebar hooks

Fall Protection Kits **Kits de Protección de la Caída** Kits de Protection de Chute

Belts		Size ▼
	SY1685	X-Small
	SY1681	Small
	SY1680	Medium
	SY1682	Large
	SY1683	X-Large

Belts		Size ▼
	SY1684	XX-Large

Lumbar Belts		Description ▼
	SY6431	• Small 28"- 32" (711mm - 813mm) • Black
	SY6432	• Medium 33"- 38" (838mm - 965mm) • Black

	Description ▼
SY6433	• Large 39"- 44" (991mm - 1118mm) • Black
SY6434	• X-Large 45"- 49" (1143mm - 1245mm) • Black

Lanyards ▼		Description
	CR77455	• Positioning lanyard • 8'
	SY6450	• Lanyard • 6' with shock absorber pack
	SY6451	• Shock absorbing lanyard • 18"
	SY6452	• Double legged lanyard • With shock absorber pack

Lanyards ▼		Description
	SY6453	• Positioning lanyard • 6'
	SY6456	• Rope lanyard • 6'
Carabiner 	SY6455	
Cross Arm Anchor 	SY6454	

Pedals & Pedal Pads **Pedales & Cubiertas del Pedal** Pédales & Couvertures de Pédale

	Length ▼	Width	Type
SY45458	2.13" 54mm	1.65" 42mm	Rubber
SY82499	2.89" 74mm	3.46" 88mm	Rubber
SY51753	2.95" 75mm	2.13" 54mm	Rubber
SY43122	2.96" 75mm	2.45" 62mm	Rubber
SY42111	2.99" 76mm	2.99" 76mm	Vulcanized rubber
SY43133	3.00" 77mm	3.01" 77mm	Rubber
SY94970	3.23" 82mm	2.24" 57mm	Rubber
SY31292	3.41" 87mm	3.29" 84mm	Rubber
SY87742	3.46" 88mm	2.76" 70mm	Rubber
SY52792	3.50" 89mm	3.43" 87mm	Rubber
SY51751	3.54" 90mm	3.19" 81mm	Rubber
SY23042	3.54" 90mm	3.54" 90mm	Rubber

Pedals & Pedal Pads **Pedales & Cubiertas del Pedal** Pédales & Couvertures de Pédale

	Length ▼	Width	Type
SY87733	3.54" 90mm	3.54" 90mm	Rubber
SY51854	3.70" 94mm	1.97" 50mm	Rubber
SY41559	3.74" 95mm	3.07" 78mm	Vulcanized rubber
SY40461	3.74" 95mm	2.40" 61mm	Rubber
SY94967	3.78" 96mm	2.95" 75mm	Rubber
SY39035	3.92" 100mm	2.56" 65mm	Rubber
SY46823	4.37" 111mm	3.15" 80mm	Rubber
SY40302	4.53" 115mm	3.03" 77mm	Rubber

	Length ▼	Width	Type
SY82772	4.53" 115mm	2.36" 60mm	Rubber
SY87732	4.53" 115mm	2.91" 74mm	Rubber
SY94966	4.53" 115mm	3.03" 77mm	Rubber
SY87740	4.61" 117mm	2.56" 65mm	Rubber
SY87741	4.72" 120mm	3.15" 80mm	Rubber
SY52793	5.08" 129mm	3.55" 90mm	Rubber
SY81168	5.24" 133mm	2.76" 70mm	Rubber
SY43860	5.51" 140mm	2.68" 68mm	Rubber

Pedals & Pedal Pads **Pedales & Cubiertas del Pedal** Pédales & Couvertures de Pédale

	Length ▼	Width	Type
SY87735	6.16" 157mm	3.28" 83mm	Rubber

	Length ▼	Width	Type
SY94023	7.64" 194mm	2.80" 71mm	Synthetic rubber

SY51853	6.34" 161mm	2.44" 62mm	Rubber

SY87745	7.68" 195mm	2.56" 65mm	Rubber

SY31421	6.61" 168mm	4.21" 107mm	Synthetic rubber

SY87743	8.03" 204mm	3.23" 82mm	Synthetic rubber

SY87731	6.65" 169mm	2.36" 60mm	Rubber

SY51958	8.07" 205mm	3.07" 78mm	Synthetic rubber

SY34438	6.77" 172mm	4.26" 108mm	Synthetic rubber

SY94956	8.07" 205mm	2.75" 70mm	Synthetic rubber

SY31392	6.77" 172mm	4.33" 110mm	Rubber

SY52401	8.15" 207mm	3.43" 87mm	Rubber

SY56919	6.78" 172mm	5.42" 138mm	Rubber

SY94965	8.15" 207mm	2.87" 73mm	Rubber

SY31982	7.48" 190mm	1.57" 40mm	Vulcanized Rubber

SY42169	8.19" 208mm	2.91" 74mm	Vulcanized rubber

Pedals & Pedal Pads **Pedales & Cubiertas del Pedal** Pédales & Couvertures de Pédale

	Length ▼	Width	Type
SY23334	8.27" 210mm	3.23" 82mm	Rubber

	Length ▼	Width	Type
SY31983	8.35" 212mm	2.56" 65mm	Rubber

	Length ▼	Width	Type
SY87737	8.70" 221mm	2.91" 74mm	Rubber

	Length ▼	Width	Type
SY94961	8.71" 221mm	2.87" 73mm	Synthetic rubber

	Length ▼	Width	Type
SY48021	8.86" 225mm	2.17" 55mm	Rubber

	Length ▼	Width	Type
SY51729	8.96" 228mm	2.77" 70mm	Rubber

	Length ▼	Width	Type
SY94021	9.02" 229mm	2.91" 74mm	Synthetic rubber

	Length ▼	Width	Type
SY51750	9.02" 229mm	3.07" 78mm	Rubber

	Length ▼	Width	Type
SY77819	9.04" 230mm	1.99" 51mm	Steel

	Length ▼	Width	Type
SY54135	9.06" 230mm	2.95" 75mm	Rubber

	Length ▼	Width	Type
SY87734	9.06" 230mm	3.11" 79mm	Rubber

	Length ▼	Width	Type
SY87746	9.80" 249mm	3.21" 82mm	Rubber

	Length ▼	Width	Type
SY40847	10.00" 254mm	3.30" 84mm	Vulcanize rubber

	Length ▼	Width	Type
SY87725	10.55" 268mm	3.11" 79mm	Synthetic Rubber

Pedal Assemblies **Ensamblajes de Pedal** Ensemble de pédales

	Description ▼
SY94712	Accelerator sub assembly
SY94711	Pedal assembly
SY32695	Pedal assembly
SY45111	Pedal assembly
SY94710	Pedal assembly
SY46826	Pedal assembly
SY94960	Pedal assembly accelerator

	Description ▼
SY45144	Pedal assembly accelerator
SY52591	Pedal assembly accelerator
SY94954	Pedal assembly monotrol
SY94713 	Parking pedal assembly
SY94958	Pedal assembly parking
SY94959	Pedal assembly parking

Gas Springs Resortes de Gas Ressorts à Gaz

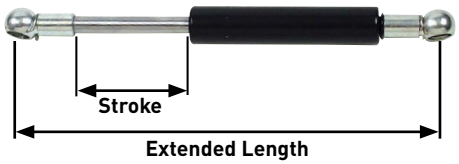

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY90115	6.49" 165mm	1.65" 42mm	300	L=25 O:10.2 T:5 M8 female connector	M8*23 thread
SY76183	7.68" 195mm	0.78" 20mm	475	Eye dia=10mm, W=16mm, L=23mm	L=16mm thread M10
SY46676	8.19" 208mm	2.76" 70mm	100	O=12,5 trac connector + plastic bushing	O=12,5 trac connector + plastic bushing
SY45150	8.66" 220mm	2.56" 65mm	590	10*19 ball socket	10*19 ball socket
SY90303	8.86" 225mm	1.97" 50mm	330	W=15mm, dia mtg eye Dia=8mm L=34mm	L=16 tread Dia=10mm M8 connector
SY90104	9.25" 235mm	3.15" 80mm	500	10*19 ball socket	10*19 ball socket
SY90095	9.25" 235mm	2.56" 65mm	650	13*30 ball socket	13*30 ball socket
SY52646	9.29" 236mm	2.83" 72mm	700	13*30 ball socket + M8 ball stud	13*25 ball socket + M8 ball stud
SY94613	9.55" 243mm	3.35" 85mm	779	C-10mm	C-10mm

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY109106	9.65" 245mm	9.65" 245mm	360	Plastic connector ball Socket dia 10mm L=18mm	Plastic connetor ball Socket dia 10mm L=18mm
SY82862	9.72" 247mm	3.23" 82mm	1000	Plastic connector	Plastic connector
SY94617	9.75" 248mm	3.50" 89mm	116	Metal 10mm	Metal 10mm
SY90118	9.84" 250mm	3.15" 80mm	110	10*19 ball socket + M8 ball stud	10*19 ball socket + M8 ball stud
SY90117	9.84" 250mm	3.15" 80mm	220	10*19 ball socket + M8 ball stud	10*19 ball socket + M8 ball stud
SY90119	9.84" 250mm	3.15" 80mm	440	10*19 ball socket + M8 ball stud	10*19 ball socket + M8 ball stud
SY90116	10.08" 256mm	3.15" 80mm	420	L=28 Ø :10.2 K:5 M6	L=28 Ø :10.2 K:5 M6
SY37558	10.12" 275mm	3.15" 80mm	1000	Thread = M8 x 1.25	Thread = M8 x 1.25
SY35140	10.83" 275mm	3.74" 95mm	450	Plastic connector ball socket dia 10mm, L=30mm	Plastic connetor ball socket dia 10mm, L=30mm
SY46964	11.10" 282mm	3.78" 96mm	910	10*19 ball socket	10*19 ball socket
SY90086	11.61" 295mm	3.35" 85mm	980	13*30 ball socket	13*30 ball socket

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY94972	11.82" 300mm	4.45" 113mm	300	Plastic connector ball socket dia 10mm, L=30mm	Plastic connetor ball socket dia 10mm, L=30mm
SY94618	12.25" 311mm	3.90" 99mm	623	C-10mm	C-10mm
SY94983	12.68" 322mm	4.13" 105mm	385	Ball stud L=28mm T=5/16"	Ball stud L=28mm T=5/16"
SY94999	13.19" 335mm	4.92"	880	Ball stud L=30mm T=M8	Ball stud L=30mm T=M8
SY37278	13.46" 342mm	4.09" 104mm	600	Mounting I.D.=9.52mm	Mounting I.D.=9.52mm
SY37280	13.46" 342mm	4.49" 114mm	600	Mounting I.D.=9.52mm	Mounting I.D.=9.52mm
SY37277	13.86" 352mm	4.13" 105mm	1400	Thread=M10 x 1.5	Thread=M10 x 1.5
SY94971	13.98" 355mm	5.12" 130mm	700	Ball stud L=30mm T=M8	Ball stud L=30mm T=M8
SY90097	14.96" 380mm	5.91" 150mm	750	13*30 ball socket	13*30 ball socket
SY90105	14.96" 380mm	6.69" 170mm	980	13*25 ball stud	13*25 ball stud
SY90080	15.28" 388mm	5.67" 144mm	530	L=25 O=11.2 T=3,5 special bracket	L=25 O=11.2 T=3,5 special bracket

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY82332	15.75" 400mm	6.38" 162mm	600	10*19 ball socket	10*19 ball socket
SY90096	15.95" 405mm	6.30" 160mm	700	Plastic connector	Plastic connector
SY94973	15.95" 405mm	6.30" 160mm	150	13*30 ball socket ball stud M8mm	13*30 ball socket ball stud M8mm
SY1211013	15.95" 405mm	6.50" 165mm	500	Plastic connector ball socket dia 10mm, L=30mm	Plastic connec- tor ball socket dia 10mm, L=30mm
SY37282	16.46" 418mm	3.74" 95mm	700	Bushing I.D.=8mm	Bushing I.D.=8mm
SY37279	16.61" 422mm	3.74" 95mm	700	Mounting I.D.=9.52mm	Mounting I.D.=9.52mm
SY90092	16.85" 428mm	6.50" 165mm	600	Plastic connector	Plastic connector
SY90079	16.93" 430mm	5.91" 150mm	920	L=25 O=11.2 T=3,5 special bracket	L=25 O=11.2 T=3,5 special bracket
SY109491	16.94" 430mm	5.91" 150mm	1100	Ball stud L=40mm T=M8 ball dia 13mm	Ball stud L=40mm T=M8 ball dia 13mm
SY94615	17.00" 432mm	6.25" 159mm	401	C-10mm	C-10mm
SY90083	17.00" 432mm	6.50" 165mm	680	L=40 K=3,5 M6+ O 11,2 plast.bush	L=40 K=3,5 Bracket+ O 11,2 plast.bush

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY90083	17.00" 432mm	6.50" 165mm	680	L=40 K=3,5 M6 + O 11,2 plastic bushing	L=40 K=3,5 bracket + O 11,2 plastic bushing
SY90081	17.00" 432mm	6.10" 155mm	720	L=25 O=11.2 T=3,5 special bracket	L=25 O=11.2 T=3,5 special bracket
SY90077	17.40" 442mm	6.30" 160mm	710	L=25 O=11.2 T=3,5 special bracket	L=25 Ø12,5 bracket
SY94622	17.70" 499mm	7.00" 178mm	1113	Metal 13mm	Metal 13mm
SY37281	17.72" 450mm	5.91" 150mm	430	L=32 O :8.2 connector M8 fork connector	13*30 ball socket + M8 ball stud + nut
SY45172	17.72" 450mm	5.91" 150mm	1000	L=32 O :8.2 M8	13*30 ball socket + M8 ball stud
SY24340	17.72" 450mm	5.91" 150mm	1160	L=32 O :8.2 connector M8 fork connector	13*30 ball socket + M8 ball stud
SY45173	17.72" 450mm	5.91" 150mm	1430	L=32 O :8.2 connector M8 fork connector	13*30 ball socket + M8 ball stud
SY45155	17.72" 450mm	5.91" 150mm	1500	L=32 O :8.2 M8	13*30 ball socket + M8 ball stud (altıgen)
SY107907	17.73" 450mm	9.65" 245mm	450	W=15mm, dia mtg Eye=8mm L=34mm	W=15mm, Dia Mtg Eye=8mm L=34mm
SY102296	17.73" 450mm	7.09" 180mm	1000	Plastic connector ball socket dia 10mm L=27mm	Plastic connector ball socket dia 10mm L=27mm

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY71869	17.92" 455mm	9.25" 235mm	600	Mounting I.D. 10mm L=22mm	Mounting I.D. 10mm L=22mm
SY107903	17.92 455mm"	6.30" 160mm	620	Ball stud L=39mm T=M8 ball dia 13mm	Ball stud L=39mm T=M8 ball dia 13mm
SY75000	18.31" 465mm	6.77" 172mm	700	Mounting I.D. = 10.4mm	Mounting I.D. = 10.4mm
SY75001	18.43" 468mm	7.17" 182mm	700	Mounting I.D. = 10mm	Mounting I.D. = 10mm
SY90103	18.50" 470mm	6.69" 170mm	1120	13*25 ball socket + M8 ball stud	13*25 ball socket + M8 ball stud
SY94748	18.51" 470mm	6.89" 175mm	500	Ball socket dia=10mm, L=29mm	L=42mm, eye dia 8mm, W=16mm
SY94619	18.75" 476mm	7.80" 198mm	668	Metal 10mm	Metal 10mm
SY41974	19.09" 485mm	7.95" 202mm	430	Plastic connector	Plastic connector
SY94980	19.10" 485mm	7.68" 195mm	900	Ball socket dia 35mm, L=26mm	Ball socket dia 35mm, L=26mm
SY94623	19.63" 498mm	8.00" 203mm	356	C-10mm	C-10mm
SY1210999	19.63" 499mm	8.00" 203mm	556	Metal 10mm	Metal 10mm

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY102293	19.70" 500mm	8.07" 205mm	180	Ball stud L=27mm T=M8 ball dia 10mm	Ball stud L=27mm T=M8 ball dia 10mm
SY71866	20.09" 510mm	9.25" 235mm	600	Mounting I.D. 10mm L=24mm	Mounting I.D. 10mm L=24mm
SY94982	20.09" 510mm	8.47" 215mm	600	Ball socket dia 8mm, L=29mm T=M6	Ball socket dia 8mm, L=29mm T=M6
SY37284	20.16" 512mm	7.87" 200mm	350	Mounting I.D. = 10mm	Thread = M8 x 1.25
SY44102	20.16" 512mm	7.99" 203mm	910	13*30 ball socket	13*25 ball socket
SY31219	20.28" 515mm	7.87" 200mm	330	Plastic connector with angle + nut + M8 ball stud	Plastic connector with angle + nut + M8 ball stud
SY44025	20.28" 515mm	8.07" 205mm	1090	13*30 ball socket	13*25 ball socket
SY90085	20.67" 525mm	6.30" 160mm	570	Plastic connector with angle + nut + M8 ball stud	Plastic connector with angle + nut + M8 ball stud
SY90107	20.79" 528mm	6.30" 160mm	360	L=15 Ø =10.2 bracket	L=15 Ø =10.2 bracket
SY94686	21.27" 540mm	6.89" 175mm	1110	Ball socket dia 13mm L=30mm	Ball socket dia 13mm L=30mm
SY90244	21.86" 555mm	10.44" 265mm	800	10*19 ball socket+ M8 ball stud	10*19 ball socket+ M8 ball stud

Gas Springs Resortes de Gas Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY94620	22.65" 575mm	9.65" 245mm	50	Ball socket dia 10mm L=26mm	Ball socket dia 10mm L=26mm
SY1220258	23.04" 585mm	10.04" 255mm	1200	Mtg eye dia=10mm T=M8 L=27mm	Mtg eye dia=10mm T=M8 L=27mm
SY23328	23.07" 586mm	10.04" 255mm	300	Plastic connector + M8	Plastic connector + M8
SY90075	23.11" 587mm	9.17" 233mm	270	10x19 ball socket+M8 ball stud	L=25 Ø12,5 bracket
SY107904	23.44" 595mm	9.65" 245mm	440	W=15mm, dia mtg eye=8mm L=22mm	W=15mm, dia mtg eye=8mm L=22mm
SY90101	23.62" 600mm	9.92" 252mm	400	L=25 Ø: 8.2 W=13 T=5 M6	L=25 Ø: 8.2 W=13 T=5 M6
SY90099	24.21" 615mm	9.06" 230mm	650	10*22+ M8	10*22+ M8
SY94614	26.38" 670mm	10.62" 270mm	329	Metal 10mm	Metal 10mm
SY90094	26.38" 670mm	10.24" 260mm	910	13*30 ball socket	13*30 ball socket
SY52258	28.94" 735mm	12.80" 325mm	270	L=28 O=10.2 T=3 M8 connector	13*30 ball socket+M8 Ball Stud
SY52255	28.94" 735mm	12.80" 325mm	410	L=28 O=10.2 T=3 M8 connector	13*30 ball socket+M8 ball stud

Gas Springs **Resortes de Gas** Ressorts à Gaz

	Extended Length ▼	Stroke	Newton	Piston Connection	Tube Connection
SY94984	29.94" 760mm	13.19" 335mm	930	Ball stud L=30mm T=5/16"	Ball stud L=30mm T=5/16"
SY37286	32.56" 827mm	13.50" 343mm	1000	Mounting I.D. = 8mm	Mounting I.D. = 8mm
SY94993	35.65" 905mm	15.76" 400mm	480	MTG thread L=12mm M10	MTG thread L=12mm M10

Consoles **Consolas** Consoles

Console with Pen and Lanyard ▼

SY99-03003

Console with Power Port, Pen and Lanyard ▼

SY99-03003-PWR

Console, Magnet Mount, with Pen and Lanyard ▼

SY99-03003-MAG

Console, Magnet Mount with Power Port, Pen and Lanyard ▼

SY99-03003-DLX

Console Accessories

▼	Description
SY99-03051	12V Power outlet kit

▼	Description
SY99-03052	Magnet kit

▼	Description
SY99-03053	Pen with lanyard

Ram® Mounts

- **Patented ball and socket system**
- **Fully adjustable positioning features**
- **Absorbs damaging shock and vibration**
- **Designed to withstand more than 50G of shock**
- **Made in the USA**

- Sistema patentado de articulación esférica
- Posiciones completamente ajustables
- Amortigua los golpes y vibraciones dañosos
- Diseñado para ser resistente a más de 50 unidades de la fuerza de gravedad
- Hecho en los EE.UU.

- Sistema patentado de articulación esférica
- Posiciones completamente ajustables
- Amortigua los golpes y vibraciones dañosos
- Diseñado para ser resistente a más de 50 unidades de la fuerza de gravedad
- Hecho en los EE.UU.

Step 1: Select Holder

RDRAM-H0L-UN7BU

Step 2: Select Arm

RDRAM-B-201U

Step 3: Select Base

RDRAM-B-247U-4

Holder

▼	Description
RDRAM-234-6	Tough Tray II™ universal netbook, iPad & tablet cradle holder
RDRAM-H0L-TAB-LGU 	RAM Tab-Tite™ universal clamping cradle for 10" screen tablets
RDRAM-H0L-TABL-LGU	Universal large Tab-Lock™ holder for 10" screen tablets
RDRAM-H0L-TABL-SMU	Universal small Tab-Lock™ holder for 7" screen tablets
RDRAM-H0L-TAB-SMU	RAM universal small Tab-Tite™ Holder for 7" screen tablets including

▼	Description
RDRAM-H0L-UN8BCU	Universal X-Grip® II tablet holder for small tablets
RDRAM-H0L-UN9U	X-Grip® III universal clamping cradle for large tablets
RDRAP-317U	Composite universal quick draw scanner gun holder
RDRAP-396U	Power-Grip™ universal scanner gun holder

Ram® Mounts

Arm

▼	Description	Overall Length	Socket-to-Socket Length
RDRAM-201U	Standard length double socket arm	5.625"	4.500"
RDRAM-201U-B	Short double socket arm	3.500"	2.250"
RDRAM-201U-D	Long double socket arm	9.125"	8.000"

Base

▼	Description	Size
RDRAM-247U-4	Clamp with 1.5" ball	4.000" max width
RDRAM-247U-25	Clamp with 1.5" ball	2.500" max width
RDRAM-271U-2	Clamp with 1.5" ball	2.000" to 2.500"

Adapter

▼	Description
RDRAM-202U	2.5" round base with AMPs hole pattern

Log Books Libros de Registro Liste de Vérification

Lift-Truck Log

- Comes in a highly durable and visible storage case that can be easy mounted anywhere on the forklift with double sided tape
- Daily check lists - 624
- Repair request forms - 24
- Accident report forms - 4
- Near-miss report forms - 4
- Lock-out tag (required if truck unsafe to operate)
- PM tracking history - 36 events (know when to service each lift truck)
- Poly plastic case
- Pen
- Lock-out tag-out tag with pull strap

▼	Description
SY71245	Counterbalance propane
SY71246	Counterbalance electric
SY71247	Narrow aisle
SY71248	Pallet truck



▼	Description
SY1223211	Counterbalance propane refill
SY1223212	Counterbalance electric refill
SY1223213	Narrow aisle refill
SY1223214	Pallet truck refill

SY1232352 Lift-Truck log case

Checklist Caddy

- The checklist forms come with a highly durable and visible storage case that can be easy mounted anywhere on a piece of equipment
- Each checklist has 75 carbonless copy daily forklift inspection forms in each book
- (1) checklist inspection book
- (1) poly case with double sided tape for mounting, a pen with plastic wire attached

▼	Description
SY88114	Propane counterbalance
SY88115	Electric counterbalance
SY88116	Narrow aisle
SY88117	Pallet truck
SY88118	Aerial lift

▼	Description
SY71249	Counterbalance propane refill
SY71250	Counterbalance electric refill
SY71251	Narrow aisle refill
SY71252	Pallet truck refill
SY71253	Aerial lift refill

Training Entrenamiento Outils de Formation

Ultimate Training Package

- 2 S.A.F.E.-lift DVD includes:
- Counterbalance training
- Narrow Aisle training
- Pallet Truck training
- "Danger Zone" pedestrian safety DVD
- "What's Wrong With This?" refresher training DVD
- 1 High Impact Forklift safety DVD
- 10 Operator manuals of your choice
- 10 Operator exams of your choice
- 10 Wall/wallet certificates of your choice
- 11 Training overheads
- 1 Lift truck training reference manual
- 1 Model lift truck of your choice
- 1 Wire forklift for training demonstration

	Description
SY1223003	Ultimate training package



▼	Description	Version
SY71429	Safe operators manual	Counterbalance
SY71430	Safe operators manual	Counterbalance - Spanish



SY71431	Safe Operators Exam	Counterbalance
SY71432	Safe Operators Exam	Counterbalance - Spanish



SY71433	Safe Instructor Guide	Counterbalance guide
SY71434	Safe Instructor Guide	Counterbalance - Spanish



SY71435	Safe operators manual	Narrow aisle manual & exam - Spanish
SY71436	Safe operators manual	Narrow aisle
SY71437	Safe operators exam	Narrow aisle
SY71438	Safe Instructors Guide	Narrow aisle

▼	Description	Version
SY71439	Safe operators manual	Pallet truck manual & exam - Spanish
SY71440	Safe operators manual	Pallet truck
SY71441	Safe operators exam	Pallet truck
SY71442	Safe instructors guide	Pallet truck

SY71443	Safe certificates	10 wall 10 wallet
SY71444	Safe certificates	Spanish 10 wall 10 wallet

S.A.F.E. Package Deals

- 10 manuals
- 10 exams
- 10 wall & wallet certificates

▼	Description	Version
SY1223008	Safe Package Deal	Counterbalance
SY1223009	Safe Package Deal	Narrow aisle
SY1223010	Safe Package Deal	Pallet truck
SY1223011	Safe Package Deal	Counterbalance - Spanish
SY1223012	Safe Package Deal	Narrow aisle - Spanish
SY1223013	Safe Package Deal	Pallet truck - Spanish
SY71426	S.A.F.E.-Lift Counterbalance Training Kit	• 1 (45 min) lift truck training DVD • 1 (15 min) Danger Zone • 1 What's Wrong With This • 1 operator manual • 1 operator exam • 1 instructor guide • 10 each of wall/wallet card certificates

SY88163	S.A.F.E.-Lift Narrow Aisle Training Kit	• 1 (30 min) Training DVD • 1 operator manual • 1 operator exam • 1 instructor guide • 10 certificates • 10 wallet cards • 1 (17" x 22") poster

SY88168	S.A.F.E.-Lift Pallet Truck Training Kit	• 1 (15min) DVD • 1 operator manual • 1 operator exam • 1 instructor guide • 10 each of certificates/ wallet cards • 1 (17" x 22") poster

Training Entrenamiento Outils de Formation

	▼	Description	Contents
	SY71427	Train the Trainer reference binder	• How to develop a forklift training program • Forklift safety facts • OSHA's 1910.178 • General duty clause OSHA Act 5(a)(1) • Battery/propane safety maintenance • Lift truck vehicle inspections • General safe forklift operating practices • ANSI B56.1-2004 • NFPA 58: Fire safety standards for powered industrial trucks • Personal Protective Equipment and Fall Protection • OSHA State / Offices: Regional and Area
	SY71480	Aerial Work Platform training	• Aerial platform operator training DVD • Aerial platform operator training CD-Rom • Trainers guide • Participants guide • Responsibilities manual • Operator manual on scissor lifts, articulating booms, telescopic booms, trailer mounted booms
	SY71489	Versa Handler training	• Administrator's guide • 5 manuals • 5 wall and wallet certificates
	SY71493	Rough terrain forklift training	• Straight mast & truck mount rough terrain forklift DVD • Instructors guide • Agent, objectives & goals sheet • Instructors resource guide • Evaluation test • Evaluation log book • 5 student operator's workbooks • 5 operator certificate of completion • 5 operator wall-size completion ID cards • Visual aids

Training DVDs

	▼	Description
	SY71428	Danger Zone DVD - pedestrian safety
	SY71447	More High Impact Forklift Safety
	SY71445	What's Wrong With This

	▼	Description
	SY71449	ABC's of Fall Protection
	SY1223014	Wire lift truck training model

Aerial Safety Manuals

	Description
SYA92.3	Manually propelled aerial work platform

	Description
SYA92.5	Boom, elevating work platform manual

	Description
SYA926	Self propelled, scissors manual

	Description
SYEMIAWP	Aerial platform manual

Gloves Guantes Gants

MX Prohandling Material Handling Gloves

	Size ▼	Features
SY1223108	Small	• Silicone strips on fingertips and palm for secure grip • Designed for packaging/assembly operations and handling boxes • Excellent for working with steel and plastic strapping material • Greatly reduces skin abrasions and cuts • Machine washable
SY1223109	Medium	
SY1223110	Large	
SY1223111	X-Large	

MX Pro Tool Mechanics Safety Gloves

	Size ▼	Features
SY1223120	MXS Pro Tool - black - S	• Excellent dexterity and flexibility for intricate work • Outstanding gripping power • Great protection against blisters, cuts, and abrasions • Spandex top for great flexibility and ease of movement • Machine washable
SY1223121	MXS Pro Tool - black - M	
SY1223122	MXS Pro Tool - black - L	
SY1223123	MXS Pro Tool - black - XL	
SY1223124	MXS Pro Tool - black - XXL	
SY1223125	MXS Pro Tool - blue - S	
SY1223126	MXS Pro Tool - blue - M	
SY1223127	MXS Pro Tool - blue - L	
SY1223128	MXS Pro Tool - blue - XL	
SY1223129	MXS Pro Tool - blue - XXL	
SY1223130	MXS Pro Tool - red - S	
SY1223131	MXS Pro Tool - red - M	
SY1223132	MXS Pro Tool - red - L	
SY1223133	MXS Pro Tool - red - XL	
SY1223134	MXS Pro Tool - red - XXL	

Leather Driver Gloves

	Size ▼	Features
SY1223136	Large	• Top grain pigskin • Straight thumb • General purpose protection • Strong & comfortable leather • Excellent protection for grinding, cutting, and dismantling
SY1223137	X-Large	

ProFlex® 710 Trades Gloves

	Size ▼	Features
SY710-SM	Small	• Premium EVA foam palm pad to dampen shock and impact • Abrasion resistant, textured PVC on palm and fingers • Breathable, 3-layer stretch spandex with neoprene knuckle pad • Synthetic leather palm and fingers • Terry thumb brow wipe • Flex zones for added comfort • Reinforced fingertips for optimal durability • Full-finger design
SY710-MED	Medium	
SY710-LRG	Large	
SY710-2XL	XX-Large	

ProFlex® 815 Utility EZ Gloves

	Size ▼	Features
SY815-SM	Small	• Durable synthetic leather palm • Breathable air-mesh back • Reinforced fingertips • Gauntlet cuff • Terry thumb brow wipe
SY815-MED	Medium	
SY815-LRG	Large	
SY815-XL	X-Large	
SY815-2XL	XX-Large	

ProFlex® 817 Thermal Utility Gloves

	Size ▼		Size ▼		Features
SY817-SM	Small	SY817WP-SM	Small	Waterproof	• 40g 3M™ Thinsulate™ insulation • Double reinforced synthetic leather palm • Padded spandex back and neoprene knuckle pad • Low-profile closure with woven elastic cuff • Terry thumb brow wipe
SY817-MED	Medium	SY817WP-MED	Medium	Waterproof	
SY817-LRG	Large	SY817WP-LRG	Large	Waterproof	
SY817-XL	X-Large	SY817WP-XL	X-Large	Waterproof	
SY817-2XL	XX-Large	SY817WP-2XL	XX-Large	Waterproof	

Gloves Guantes Gants

ProFlex® 819 Thermal Gauntlet Gloves w/ Outdry

	Size ▼	
SY819WP-LRG	Large	Waterproof
SY819WP-XL	X-Large	Waterproof

Features
- 40g 3M™ Thinsulate™ insulation
- Hipora® breathable waterproof & windproof insert liner
- PVC-reinforced palm, fingers and saddle
- 500D nylon back and gauntlet cuff
- Gathered wrist and reinforced fingertips
- EVA knuckle pad with reflective dots
- Pull tab for easy on and off
- Terry thumb brow wipe

ProFlex® 840 Leather Trades Gloves

	Size ▼
SY840-SM	Small
SY840-MED	Medium
SY840-LRG	Large
SY840-XL	X-Large
SY840-2XL	XX-Large

Features
- Split leather reinforced fingertips
- Molded TPR protectors on knuckle and fingers
- Kevlar-reinforced saddle and thumb
- PU foam padded palm
- Knuckle pad to protect against bumps and bruises
- Gauntlet cuff with pull tab for easy on/off
- Terry thumb brow wipe

872 HI-VIS Mesh Trades Gloves

	Size ▼
SY872HV-MED	Medium
SY872HV-LRG	Large
SY872HV-XL	X-Large

Features
- Abrasion resistant, textured PVC on palm and fingers
- Breathable hi-vis air-mesh back
- 3M™ Scotchlite™ reflective material zones on back
- Durable synthetic leather palm
- Breathable neoprene cuff with low-profile closure
- Terry thumb brow wipe

ProFlex® 876WP Hi-Vis Thermal Waterproof Gloves

	Size ▼	
SY876WP-SM	Small	Waterproof
SY876WP-MED	Medium	Waterproof
SY876WP-LRG	Large	Waterproof
SY876WP-XL	X-Large	Waterproof
SY876WP-2XL	XX-Large	Waterproof

Features
- 40g 3M™ Thinsulate™ insulation
- Hipora® breathable waterproof & windproof insert liner
- PVC-reinforced palm, fingers and saddle
- 500D nylon back and gauntlet cuff
- Gathered wrist and reinforced fingertips
- EVA knuckle pad with reflective dots
- Pull tab for easy on and off
- Terry thumb brow wipe

ProFlex® 925F(x) Dosal Impact-Reducing Gloves

	Size ▼	
SY925FX-SM	Small	
SY925FX-MED	Medium	
SY925FX-LRG	Large	
SY925FX-XL	X-Large	
SY925FX-2XL	XX-Large	
SY925FX-3XL	XXX-Large	
SY925FWP-SM	Small	Waterproof
SY925FWP-MED	Medium	Waterproof
SY925FWP-LRG	Large	Waterproof
SY925FWP-XL	X-Large	Waterproof
SY925FWP-2XL	XX-Large	Waterproof
SY925FWP-3XL	XXX-Large	Waterproof

Features
- Molded TPR armor on knuckles, fingers and carpal bone for impact protection, pinch injury prevention, and blow deflection
- Armor "flex zones" for high dexterity
- 5mm EVA dorsal pad protects vulnerable metacarpal region
- 5mm EVA palm and ulnar padding protects against "chopping" blows
- Abrasion-resistant PVC on palm and 3 fingers limits liquid penetration; hi-vis orange for hand signaling
- Non-slip Armortex® reinforcement zones on thumb saddle and index finger for enhanced protection, grip and durability
- Reinforced Kevlar® palm stitching for extended wear and durability
- Reflective accents and hi-vis color scheme for optimal hand visibility
- Contoured neoprene cuff with reflective pull-on tab resists snagging while offering a secure fit and easy on/off
- Patented design

ProFlex® 9002 Certified anti-Vibration Gloves

	Size ▼
SY9002-SM	Small
SY9002-MED	Medium
SY9002-LRG	Large
SY9002-XL	X-Large
SY9002-2XL	XX-Large

Features
- ANSI S2.73/ISO 10819:1996/EN388/EN420 certified
- Patented Nu2O2® polymer pad
- Pigskin leather palm and fingers
- Low-profile closure with woven elastic cuff
- Neoprene knuckle pad
- Anti-odor treatment
- Pull-on tab

Coveralls Monos de Trabajo Bleu de Travail

Gen-Nex All-Purpose Coveralls

	Size ▼	Features
SY1223138	Small	• Anti-static • Cloth-like fiber • Full zipper front and elastic wrists
SY1223139	Medium	
SY1223140	Large	
SY1223141	X-Large	
SY1223142	XX-Large	

Back Up Handles Mangos de Seguridad Poignées de Sécurité

Back Up Buddy Ergonomic Handle

▼	Description	Features
SY71254	Back Up Buddy	• Forklift operator ergonomics that easing back stress when turning around • Fits any lift truck • Installs in minutes • Keeps forklift operator's hand inside the operator compartment • Optional horn switch allows operator to keep left hand on steering wheel

SY71255	Back Up Buddy with horn button	